
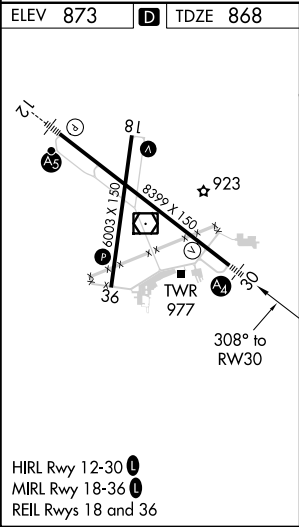


WAAS CH 78201 W30A	APP CRS 308°	Rwy Idg 8399 TDZE 868 Apt Elev 873
--	------------------------	---

RNAV (GPS) RWY 30

WATERLOO RGNL (A.L.O)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Inop table does not apply LPV all Cats. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM. MALS = MISSED APPROACH: Climb to 3400 direct EYUCE and hold.		ATIS 120.65	WATERLOO APP CON★ 118.9 251.15	WATERLOO TOWER★ 125.075 (CTAF) 0 257.8	GND CON 121.9 269.1	UNICOM 122.95
--	--	-----------------------	--	--	-------------------------------	-------------------------

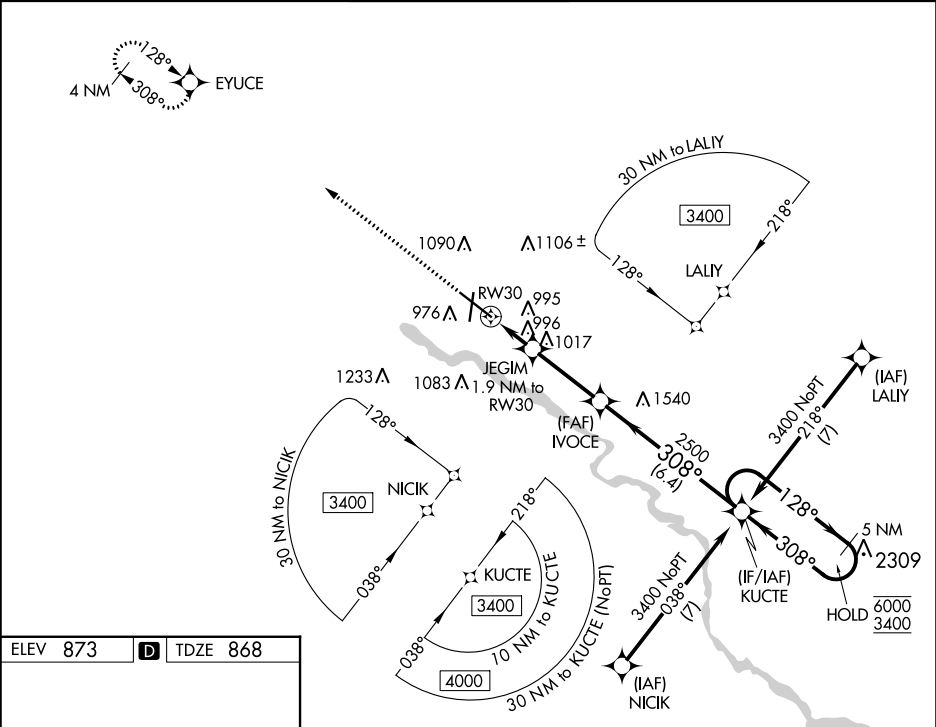

3400

↑

EYUCE

✦

* LNAV only

RW30

1.1 NM

0.8

3.1 NM

6.4 NM

JEGIM

1.9 NM to RW30

IVOCE

2500

KUCTE

5 NM Holding Pattern

128°

308°

308°

3400

6000

1520*

2500

GP 3.00°

TCH 52

CATEGORY	A		B	C	D
LPV DA			1068-¾	200 (200-¾)	
LNAV/VNAV DA			1145-¾	277 (300-¾)	
LNAV MDA	1260-¾	392 (400-¾)		1260-7/8	392 (400-7/8)
CIRCLING	1360-1 487 (500-1)	1400-1 527 (600-1)	1480-1¾ 607 (700-1¾)	1600-2¼ 727 (800-2¼)	