

WAAS

CH 86227

W24A

APP CRS

238°

Rwy Idg

6201

TDZE

2087

Apt Elev

2105

RNAV (GPS) RWY 24

NEW RIVER VALLEY (PSK)

RNP APCH


▼

Baro-VNAV NA when using Blacksburg altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 45°C. When local altimeter setting not received, use Blacksburg altimeter setting and increase all DA 36 feet, and all MDA 40 feet; increase LNAV/VNAV all Cats and LNAV Cat C visibility ¼ SM. Circling NA for Cat D northwest of Rwy 6-24.

⚠

MISSED APPROACH: Climb to 5000 direct GUNTO and hold.

AWOS-3 127.375	ROANOKE APP CON 126.0 339.8	ROANOKE CLNC DEL 121.7	UNICOM 122.7 (CTAF) 0
-------------------	--------------------------------	---------------------------	--------------------------

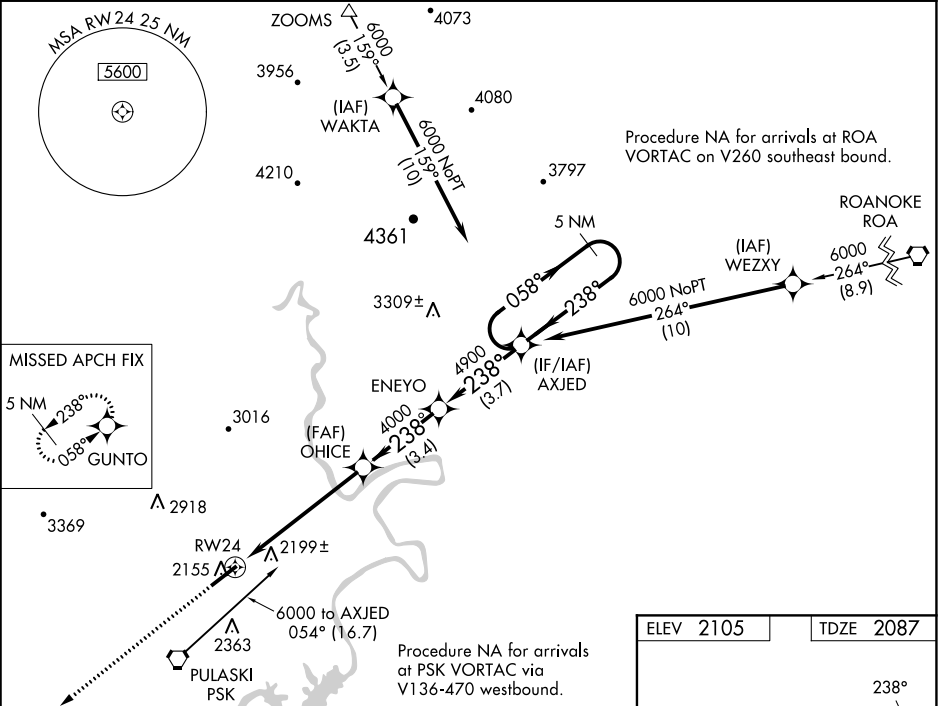

5000

GUNTO

OHICE

4000

ENEYO

AXJED

5 NM Holding Pattern

RW24

4900

238°

058°

6000

GP 3.00° TCH 44

5.8 NM

3.4 NM

3.7 NM

CATEGORY	A	B	C	D
LPV DA	2337-1 250 (300-1)			
LNAV/VNAV DA	2502-1½ 415 (400-1½)			
LNAV MDA	2460-1 373 (400-1)		2460-1¼ 373 (400-1¼)	
CIRCLING	2620-1 515 (600-1)	2680-1 575 (600-1)	2780-2 675 (700-2)	2780-2¼ 675 (700-2¼)

238°

2174±

0.5% UP

2113±

2166±

2268

6201 X 150

ELEV 2105

TDZE 2087

HIRL Rwy 6-24 0

REIL Rwy 24 0