


WAAS CH 87015 W06A	APP CRS 058°	Rwy Idg TDZE Apt Elev	6201 2105 2105
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 6
NEW RIVER VALLEY (PSK)

RNP APCH.		MALSR	
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 44°C. When local altimeter setting not received, use Blacksburg altimeter setting and increase all DA 36 feet, and all MDA 40 feet. VDP and Baro-VNAV NA when using Blacksburg altimeter setting. Inop table does not apply to LPV all Cats and LNAV Cats A and B. For inop MALSR, increase LNAV Cat C visibility to 1¼ SM. Circling NA for Cat D northwest of Rwy 6-24.		MISSED APPROACH: Climb to 6000 direct OHICE and right turn via track 171° to FAPOM and via track 186° to WILIZ and hold.	
AWOS-3 127.375	ROANOKE APP CON 126.0 339.8	ROANOKE CLNC DEL 121.7	UNICOM 122.7 (CTAF)

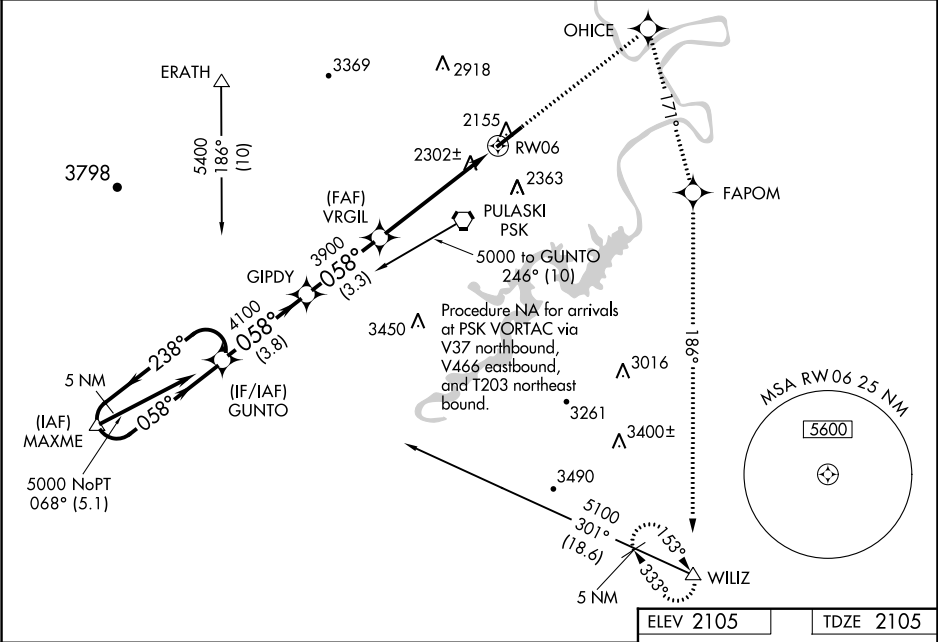

5 NM Holding Pattern		6000	OHICE	FAPOM	WILIZ
GUNTO			tr 171°	tr 186°	△
5000 ← 238° 058° →		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 58).			
GP 3.00° TCH 58		* LNAV only.			
4100		* 1.3 NM to RWY 06			
3900		RWY 06			
3.8 NM		3.3 NM	4.1 NM	1.3 NM	
CATEGORY	A	B	C	D	
LPV DA		2305-1	200 (200-1)		
LNAV/ DA		2597-1¼	492 (500-1¼)		
LNAV MDA		2560-1	455 (500-1)		
CIRCLING	2620-1 515 (600-1)	2680-1 575 (600-1)	2780-2 675 (700-2)	2780-2¼ 675 (700-2¼)	
					HIRL Rwy 6-24 REIL Rwy 24