

LOC I-AID
110.1

APP CRS
298°

Rwy Idg
TDZE
Apt Elev
5320
919
919

ILS or LOC RWY 30

ANDERSON MUNI-DARLINGTON FLD (AID)


ADF required.
RADAR required for procedure entry.

MALSF

MISSED APPROACH: Climb to 2200 then climbing right turn to 2900 direct VIDEO LOM/RADAR and hold.

▼ Rwy 30 helicopter visibility reduction below ¾ SM NA.
▲ For inop ALS, increase S-ILS 30 all Cats visibility to ¾ SM.

AWOS-3 128.55	INDIANAPOLIS APP CON 120.65 317.8	ANDERSON TOWER ★ 126.0 (CTAF) 0	GND CON 121.6	UNICOM 122.95
-------------------------	---	--	-------------------------	-------------------------

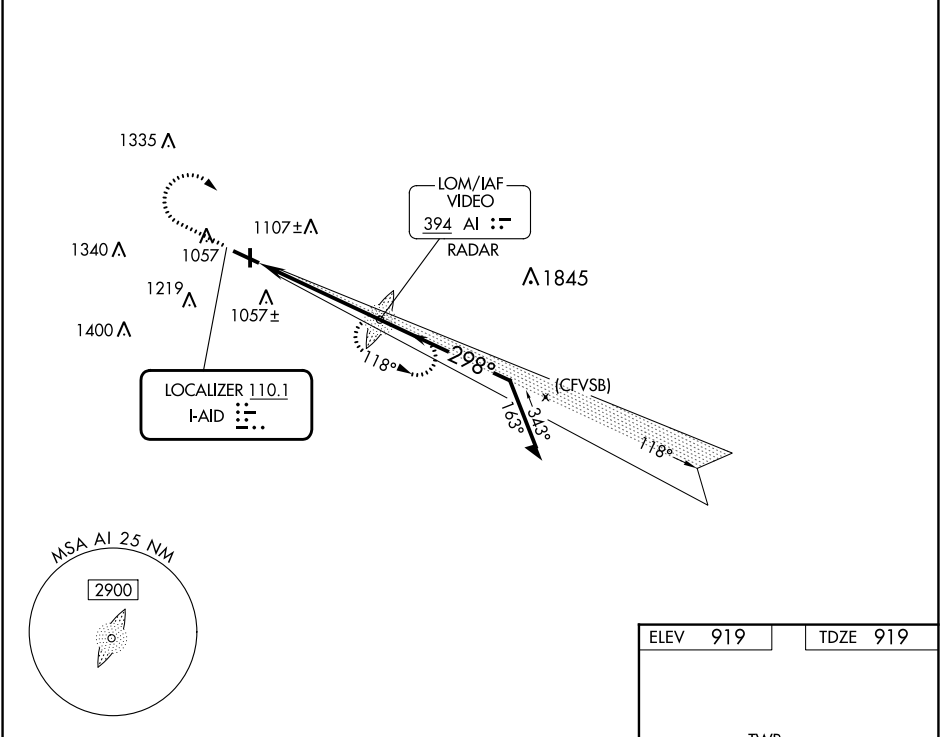

2200	2900	AI RADAR	AI LOM/RADAR	Remain within 10 NM	2520	118°	298°	2900	2700	GS 3.00°	TCH 48
4.9 NM											
CATEGORY	A	B	C	D							
S-ILS 30	1209-¾ 290 (300-¾)										
S-LOC 30	1440-¾ 521 (600-¾)		1440-1¼ 521 (600-1¼)								
CIRCLING	1440-1 521 (600-1)		1520-1¾ 601 (700-1¾)		1520-2 601 (700-2)						

ELEV 919 TDZE 919

REIL Rwy 12
MIRL Rwy 12-30 and 18-36 **0**

FAF to MAP 4.9 NM

Knots	60	90	120	150	180
Min:Sec	4:54	3:16	2:27	1:58	1:38