
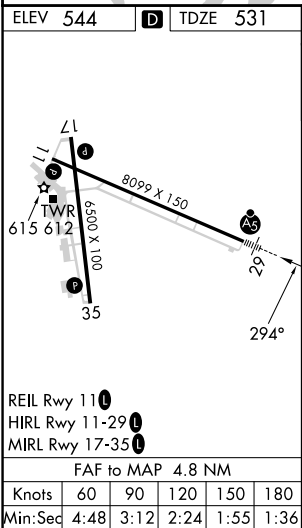


LOC/DME	I-ALN	APP CRS	Rwy Idg	8099
108.5		294°	TDZE	531
Chan 22			Apt Elev	544

ILS or LOC RWY 29

ST LOUIS RGNL (ALN)

For inop ALS, increase WULIB fix minimums S-LOC 29 Cats C/D visibility to 1 SM.		MALSR A5	MISSED APPROACH: Climb to 1000 then climbing right turn to 2200 on heading 310° and on TOY VORTAC R-322 to TOPAZ INT/TOY 16 DME and hold.		
ATIS 128.0	ST LOUIS APP CON 124.2 353.9	REGIONAL TOWER ★ 126.0 (CTAF) 0 239.0	GND CON 120.2	CINC DEL 120.2 (when tower closed)	UNICOM 122.95

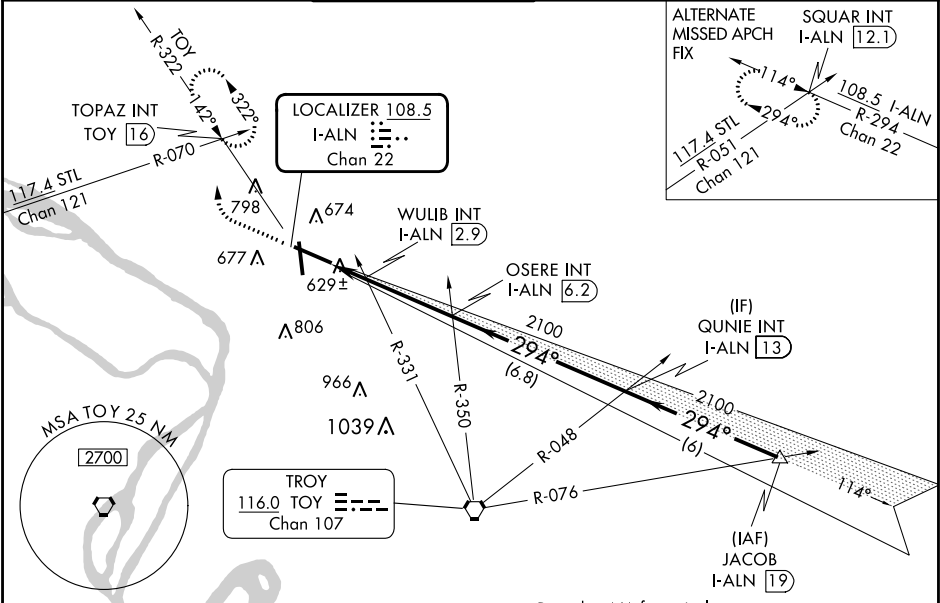

Procedure NA for arrivals at JACOB on V12 northeast bound.				
1000 ↑	2200 hdg R-322 310°	TOY R-322	TOPAZ INT	*LOC only.
		OSERE INT I-ALN 6.2		
		QUNIE INT I-ALN 13		
		JACOB I-ALN 19		
WULIB INT I-ALN 2.9		2100		
I-ALN 1.5		2100		
1.4 NM		3.3 NM		2100
		6.8 NM		2100
		6 NM		GS 3.00° TCH 55
CATEGORY	A	B	C	D
S-ILS 29	731-1/2 200 (200-1/2)			
S-LOC 29	980-1/2	449 (500-1/2)	980-7/8	449 (500-7/8)
CIRCLING	1000-1	456 (500-1)	1160-13/4 616 (700-13/4)	1200-2 656 (700-2)
WULIB FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 29	880-1/2	349 (400-1/2)	880-5/8	349 (400-5/8)
CIRCLING	1000-1	456 (500-1)	1160-13/4 616 (700-13/4)	1200-2 656 (700-2)