

APP CRS
354°

Rwy Idg
TDZE
544

Apt Elev
544

RNAV (GPS) RWY 35

ST LOUIS RGNL (ALN)

RNP APCH

▼ Visibility reduction by helicopters NA. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all MDA 60 feet, increase LNAV Cat C/ D visibility ½ SM and Circling Cat C/D visibility ¼ SM. When VGSi inop, straight-in/ Circling Rwy 35 procedure and Circling Rwy 17 NA at night.

MISSED APPROACH: Climb to 2200 direct JETIK and hold.

ATIS
128.0


ST LOUIS APP CON
124.2 353.9

REGIONAL TOWER ★
126.0 (CTAF) 0 239.0

GND CON
120.2

CLNC DEL
120.2
(when tower closed)

UNICOM
122.95

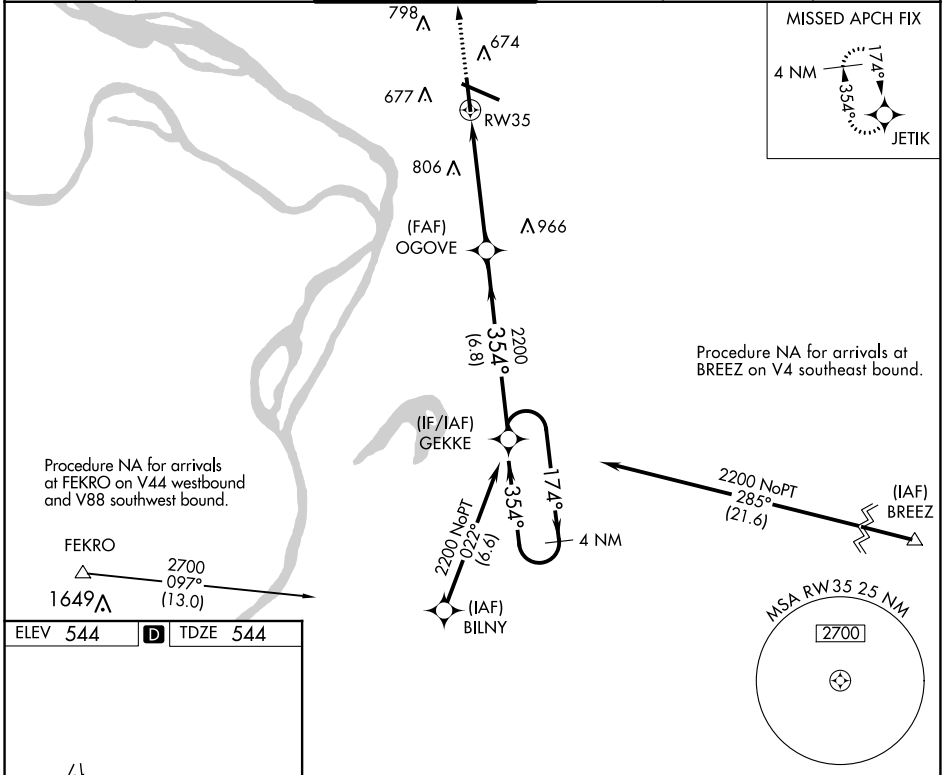

2200

JETIK

Visual Segment - Obstacles.

OGOVE

GEKKE

4 NM Holding Pattern

RW35

2200

354°

174°

2200

5.1 NM

6.8 NM

CATEGORY	A	B	C	D
LNAV MDA	1020-1	476 (500-1)	1020-1⅓ 476 (500-1⅓)	
CIRCLING	1020-1	476 (500-1)	1160-1¾ 616 (700-1¾)	1200-2 656 (600-2)