

LOC/DME I-GFK 109.1 Chan 28	APP CRS 174°	Rwy Idg TDZE 843 Apt Elev 845
---	------------------------	---

LOC BC RWY 17R

GRAND FORKS INTL (GFK)



DME or ADF or RADAR required.

▼

When local altimeter setting not received, use Crookston altimeter setting and increase all MDA 80 feet; increase S-17R Cat C visibility 1/8 SM and Circling Cat C visibility 1/4 SM. Increase WUSIK fix minimums S-17R Cat C visibility and Circling Cat C visibility 1/4 SM.

MISSED APPROACH: Climb to 2600 on I-GFK south course (174°) to HISER LOM/I-GFK 6.9 DME/RADAR and hold.

ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER★ 118.4 (CTAF) 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95
----------------------	---	---	---------------------------	----------------------------	-------------------------

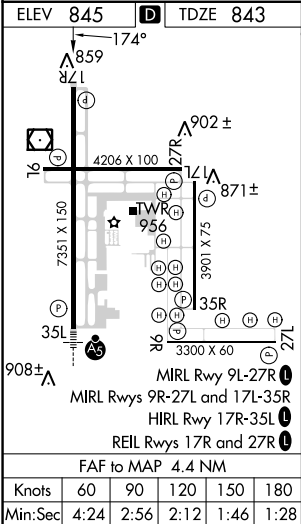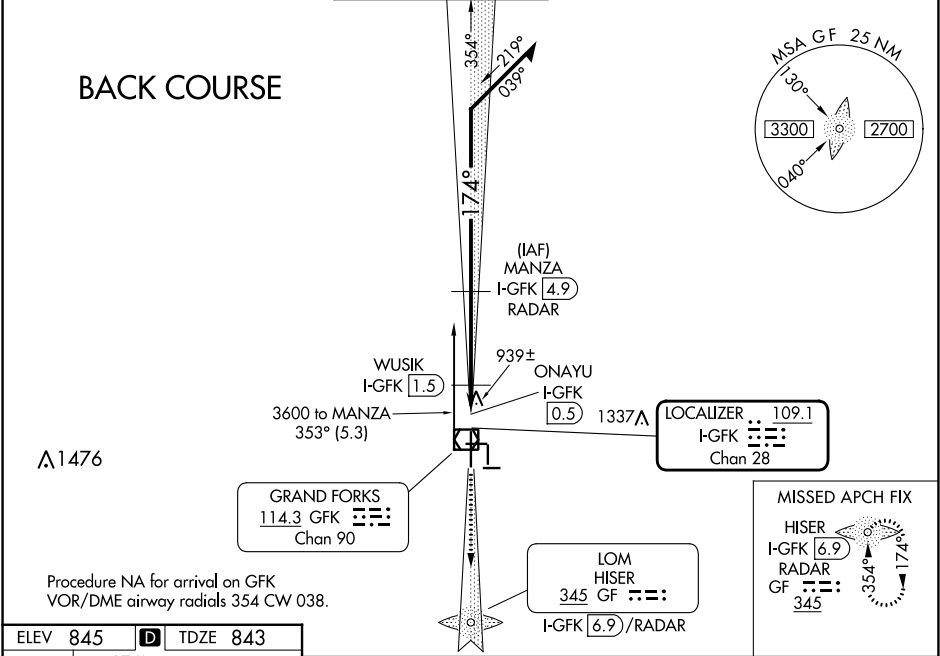

2600

GF

I-GFK S crs (174°)

MANZA

I-GFK **4.9**

RADAR

Disregard glideslope indications.

Remain within 10 NM

354°

174°

2500

2500

1300*

≤3.00°

TCH 53

*1380 when using Crookston altimeter setting.

CATEGORY	A	B	C	D
S-17R	1300-1	457 (500-1)	1300-1 ³ / ₈ 457 (500-1 ³ / ₈)	1300-1 ¹ / ₂ 457 (500-1 ¹ / ₂)
CIRCLING	1300-1	455 (500-1)	1400-1 ¹ / ₂ 555 (600-1 ¹ / ₂)	1400-2 555 (600-2)
WUSIK FIX MINIMUMS				
S-17R	1200-1 357 (400-1)			1200-1 ¹ / ₄ 357 (400-1 ¹ / ₄)
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1 ¹ / ₂ 555 (500-1 ¹ / ₂)	1400-2 555 (600-2)