


WAAS CH 58104 W09A	APP CRS 084°	Rwy Idg TDZE 843 Apt Elev 845
--	------------------------	---

RNAV (GPS) RWY 9L

GRAND FORKS INTL (GFK)

RNP APCH.			MISSED APPROACH: Climb to 2800 direct URBAN and hold.		
▼ Baro-VNAV and VDP NA when using Crookston altimeter setting. ▲ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Crookston altimeter setting and increase all DA 62 feet and all MDA 80 feet, increase LNAV Cat C visibility 3/8 SM, Cat D visibility 1/8 SM and Circling Cat C 1/4 SM.					
ATIS 119.4	GRAND FORKS APP CON ★ 118.1 318.1	GRAND FORKS TOWER ★ 118.4(CTAF) 350.35	GND CON 124.575	CLNC DEL 135.725	UNICOM 122.95

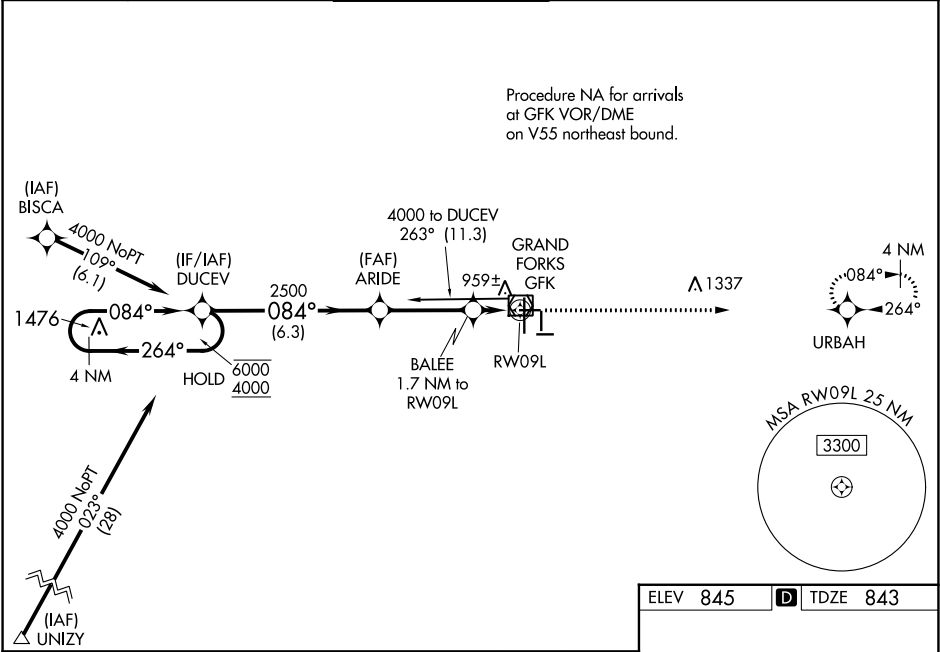

4 NM Holding Pattern		DUCEV	ARIDE	BALEE 1.7 NM to RW09L	2800 URBAN
6000 ← 264°		084° →	2500	*1.1 NM to RW09L	*LNAV only
4000		084°	2500	*1.1 NM to RW09L	
GP 3.00° TCH 39°			2500	*1.1 NM to RW09L	
			6.3 NM	3.3 NM	0.6
CATEGORY	A	B	C	D	
LPV DA	1093-1 250 (300-1)				
LNAV/VNAV DA	1238-1½ 395 (400-1½)				
LNAV MDA	1220-1 377 (400-1)			1220-1¼ 377 (400-1¼)	
CIRCLING	1260-1 415 (500-1)	1300-1 455 (500-1)	1400-1½ 555 (600-1½)	1400-2 555 (600-2)	

