

LOC/DME I-AIK	APP CRS	Rwy Idg	5500
109.9	066°	TDZE	515
Chan 36		Apt Elev	529

ILS or LOC/DME RWY 7

AIKEN RGNL (AIK)


V

NA

VDP NA with Augusta Rgnl at Bush Fld altimeter setting.
When local altimeter setting not received, use Augusta Rgnl at Bush Fld altimeter setting: increase S-ILS 7 all Cats DAs to 819 feet and all Cats visibility ¼ SM; increase all MDAs 120 feet and S-LOC 7 Cats C/D visibility ¾ SM and Circling Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 on heading 276° and I-AIK SW course (246°) to VIXLY INT/I-AIK 12.7 DME and hold.

AWOS-3 118.025	AUGUSTA APP CON ★ 119.15 284.625	CLNC DEL 126.075	UNICOM 122.8 (CTAF) 0
-------------------	-------------------------------------	---------------------	--------------------------

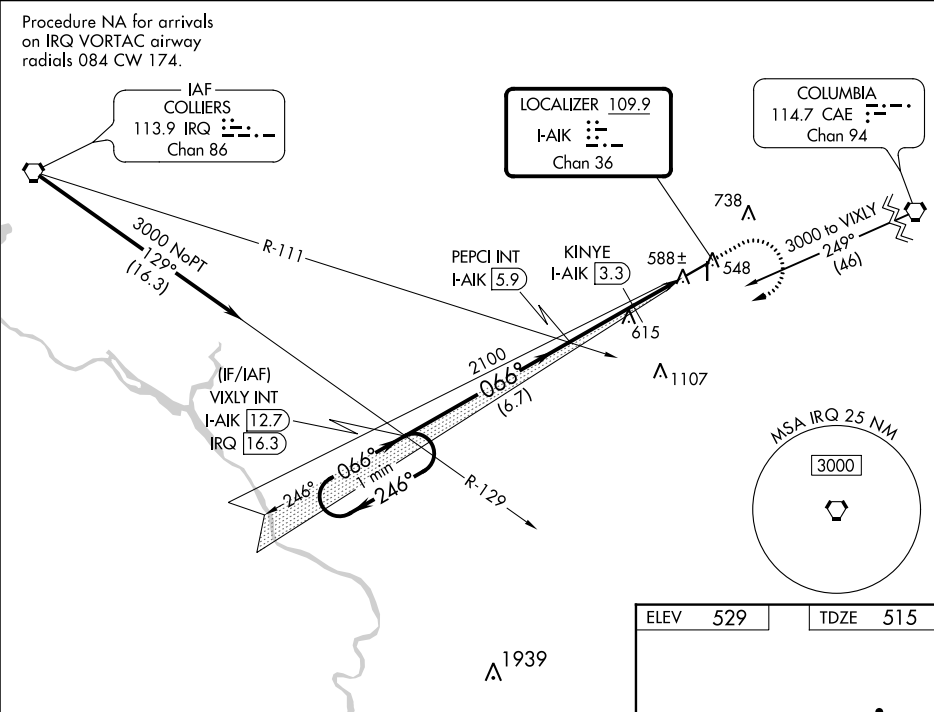

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 41).

One Minute Holding Pattern

VIXLY INT I-AIK 12.7

PEPCI INT I-AIK 5.9

3000

246°

066°

066°

2100

2100

1100

1100

3000

hdg 276°

I-AIK SW crs

VIXLY INT

Min Alt 1160 when using Augusta Rgnl at Bush Field altimeter setting.

KINYE I-AIK 3.3

* I-AIK 2.1

* I-AIK 1.1

* LOC only.

GS 3.00° TCH 45

6.7 NM

2.6 NM

1.3 NM

1.0

ELEV 529

TDZE 515

REIL Rwy 25

MIRL Rwy 7-25 0

CATEGORY	A	B	C	D
S-ILS 7		715-¾	200 (200-¾)	
S-LOC 7		880-1	365 (400-1)	
CIRCLING	980-1 451 (500-1)	1000-1 471 (500-1)	1140-1¾ 611 (700-1¾)	1420-3 891 (900-3)