


WAAS CH 70302 W16A	APP CRS 161°	Rwy ldg 6200 TDZE 192 Apt Elev 192
--	------------------------	---


RNAV (GPS) RWY 16L

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.		MALSR	MISSED APPROACH: Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.	
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.		AS		
ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER ★ 133.1 (CTAF) 0 360.75	GND CON 121.8	CLNC DEL 120.2

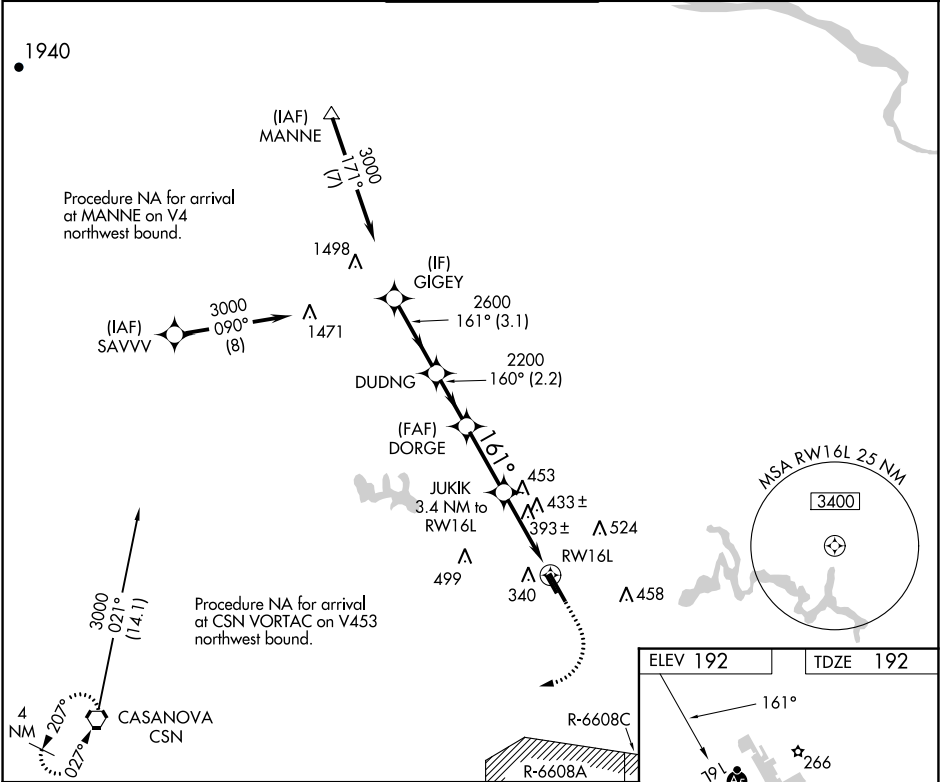

GIGEY		DUDNG	DORGE	JUKIK	CSN
3000		2600	2200	1320	700
GP 3.00°		161°	160°	161°	3000
TCH 58		2200	2200	1320	CSN
3.1 NM		2.2 NM	2.7 NM	2.1 NM	1.3 NM
CATEGORY	A	B	C	D	
LPV DA	442-½ 250 (300-½)				
LNAV/VNAV DA	635-7⁄8 443 (500-¾)				
LNAV MDA	660-½	468 (500-½)	660-1	468 (500-1)	
CIRCLING	720-1 528 (600-1)	740-1 548 (600-1)	840-1¾ 648 (700-1¾)	880-2¼ 688 (700-2¼)	

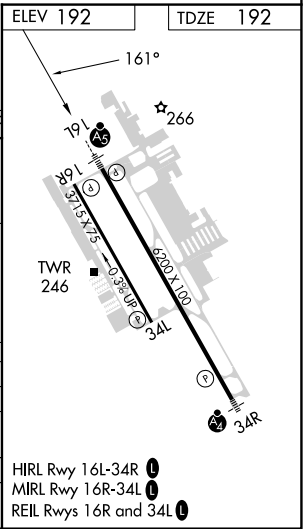

NE-3, 18 APR 2024 to 16 MAY 2024

NE-3, 18 APR 2024 to 16 MAY 2024