

WAAS
CH **78035**
W16B

APP CRS
161°

Rwy ldg **3715**
TDZE **186**
Apt Elev **192**

RNAV (GPS) RWY 16R

MANASSAS RGNL/HARRY P DAVIS FLD (HEF)

RNP APCH - GPS.


▼

Rwy 16R helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:

Climb to 700 then climbing right turn to 3000 direct CSN VORTAC and hold.

ATIS 125.175	POTOMAC APP CON 128.525 306.925	MANASSAS TOWER ★ 133.1 (CTAF) 0 360.75	GND CON 121.8	CLNC DEL 120.2
------------------------	---	--	-------------------------	--------------------------

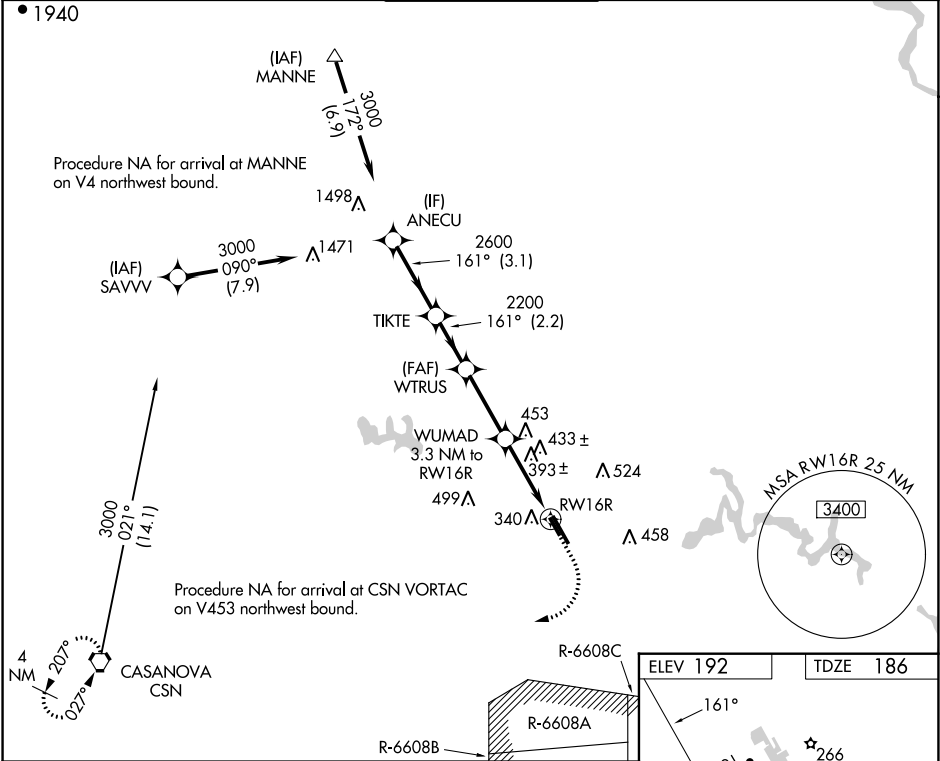

ANECU		TIKTE		WTRUS		WUMAD 3.3 NM to RW16R	
3000		2600		2200		1280	
GP 3.00°		TCH 53					
← 3.1 NM		← 2.2 NM		← 2.9 NM		← 2 NM	
A		B		C		D	
LPV	DA	494- $\frac{7}{8}$		308 (400- $\frac{7}{8}$)			
LNAV/VNAV	DA	675-1 $\frac{3}{8}$		489 (500-1 $\frac{3}{8}$)			
LNAV	MDA	660-1		474 (500-1)		660-1 $\frac{3}{8}$	
CIRCLING		720-1		740-1		840-1 $\frac{3}{4}$	
		528 (600-1)		548 (600-1)		648 (700-1 $\frac{3}{4}$)	
						880-2 $\frac{1}{4}$	
						688 (700-2 $\frac{1}{4}$)	

ELEV 192

TDZE 186

HIRL Rwy 16L-34R 1

MIRL Rwy 16R-34L 1

REIL Rwy 16R and 34L 1