

WAAS CH 77701 W27A	APP CRS 274°	Rwy Idg TDZE 15 Apt Elev 19	5000
--	------------------------	---	-------------

RNAV (GPS) RWY 27

CHARLESTON EXEC (JZI)


▼

▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Charleston AFB/Intl altimeter setting and increase LPV DA to 297 feet, increase LNAV/VNAV DA to 335 feet, increase all MDAs 40 feet; increase LPV all Cats, LNAV/VNAV all Cats, and LNAV Cats C/D visibility 1/8 SM, and Circling visibility Cats C/D 1/4 SM. Baro-VNAV and VDP NA when using Charleston AFB/Intl altimeter setting.

MISSED APPROACH:
Climb to 2000 direct RILEY and hold.

AWOS-3 123.775	CHARLESTON APP CON 120.7 306.925	CLNC DEL 119.85	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------	---------------------------------

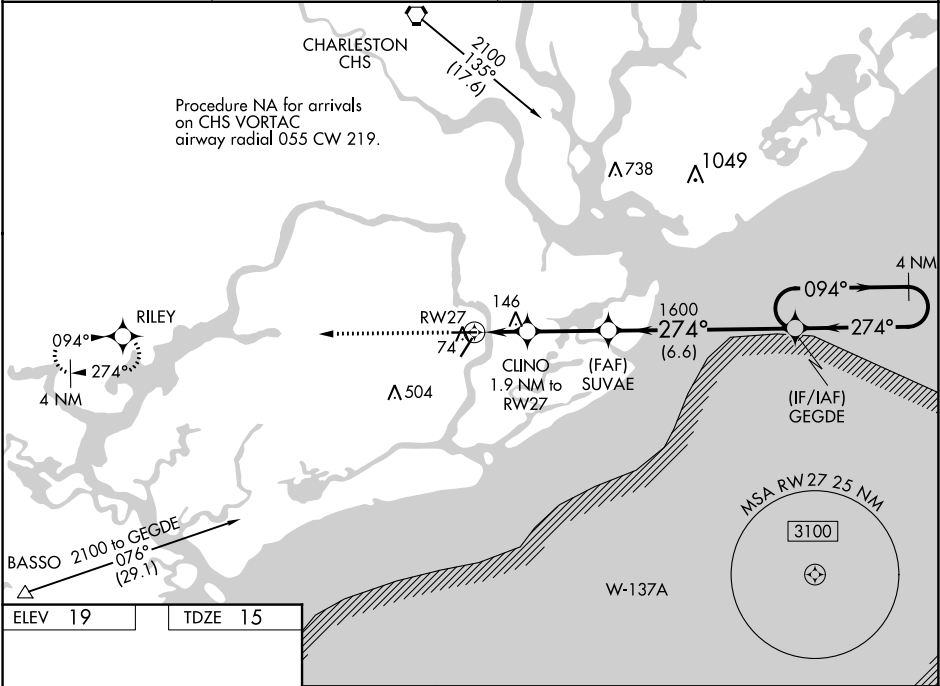

ELEV 19	TDZE 15
---------	---------

2000

RILEY

5350 X 100

4313 X 150

274° to RW27

CLINO 1.9 NM to RW27

SUVAE 1600

GEGDE 4 NM Holding Pattern

*LNAV only.

*1.1 NM to RW27

640*

1600

GP 3.00° TCH 42

CATEGORY	A	B	C	D
LPV DA	265-7/8 250 (300-7/8)			
LNAV/VNAV DA	303-1 288 (300-1)			
LNAV MDA	400-1	385 (400-1)	400-1 1/8	385 (400-1 1/8)
CIRCLING	460-1 441 (500-1)	480-1 461 (500-1)	860-2 1/2 841 (900-2 1/2)	860-2 3/4 841 (900-2 3/4)