


LOC I-SUS	APP CRS	Rwy Idg	7414
110.55	079°	TDZE	462
		Apt Elev	463

ILS or LOC RWY 8R
SPIRIT OF ST LOUIS (SUS)

	When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase all DA to 719 feet, all MDA 60 feet, increase S-LOC 8R Cats C/D to RVR 5000 and Circling Cat C visibility ¼ mile. For inop MALSRR, increase S-LOC 8R Cats C/D visibility to RVR 6000. For inop MALSRR when using St Louis Lambert Intl altimeter setting, increase S-LOC 8R Cats C/D visibility to 1¾ mile. * RVR 1800 authorized with the use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl altimeter setting).				MALSRR 	MISSED APPROACH: Climb to 1500 then climbing left turn to 2400 direct FTZ VORTAC and hold.
	ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER ★ 124.75 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 133.1	ST. LOUIS CLNC DEL 121.7 (when tower closed)

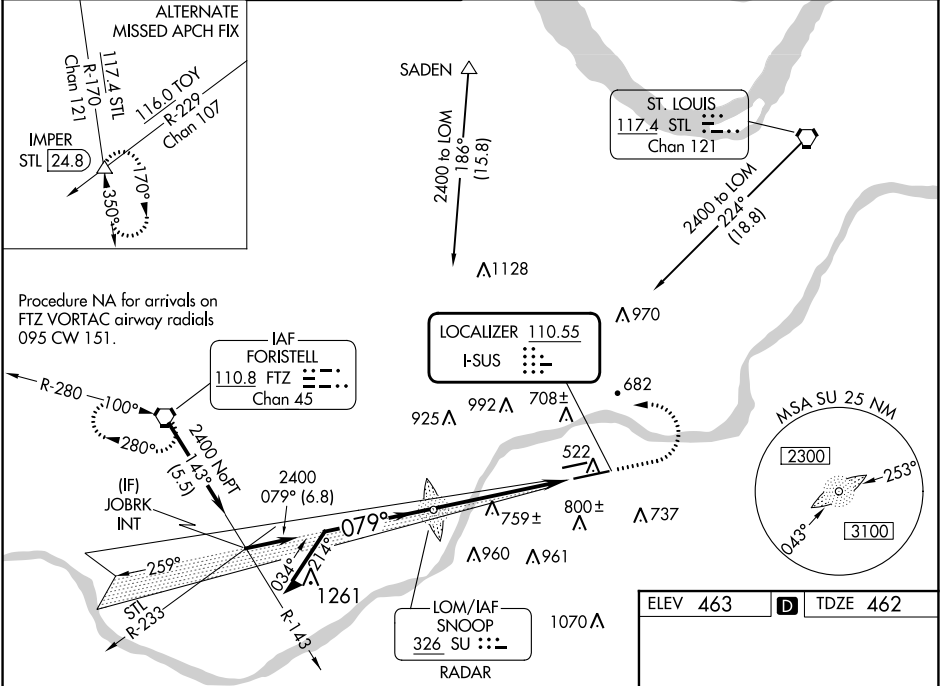

Remain within 10 NM			
SU LOM RADAR			
2400 259° 2185 079° 2400 5.2 NM			
GS 3.00° TCH 55			
CATEGORY	A	B	C
S-ILS 8R*	662/24 200 (200-½)		
S-LOC 8R	880/24	418 (500-½)	880/40 418 (500-¾)
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1160-2 697 (700-2) 1360-3 897 (900-3)

ELEV 463	TDZE 462
MIRL Rwy 8L-26R	
HIRL Rwy 8R-26L	
FAF to MAP 5.2 NM	
Knots	60 90 120 150 180
Min:Sec	5:12 3:28 2:36 2:05 1:44

NC-3, 18 APR 2024 to 16 MAY 2024

NC-3, 18 APR 2024 to 16 MAY 2024