


WAAS CH 61032 W30A	APP CRS 305°	Rwy Idg TDZE 1056 Apt Elev 1060
--	------------------------	---

RNAV (GPS) RWY 30
FARIBAULT MUNI-LIZ WALL STROHFUS FLD (F'BL)


⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Owatonna altimeter setting and increase all DA 41 feet and all MDA 60 feet; increase LNAV Cat C visibility 1/8 mile. Baro-VNAV and VDP NA when using Owatonna altimeter setting. Circling NA to Rwy's 1 and 19.

MISSED APPROACH: Climb to 3000 direct FABAU and hold.

AWOS-3 120.2	MINNEAPOLIS APP CON 134.7 284.7	GCO 121.725	UNICOM 122.8 (CTAF) 0
------------------------	---	-----------------------	--

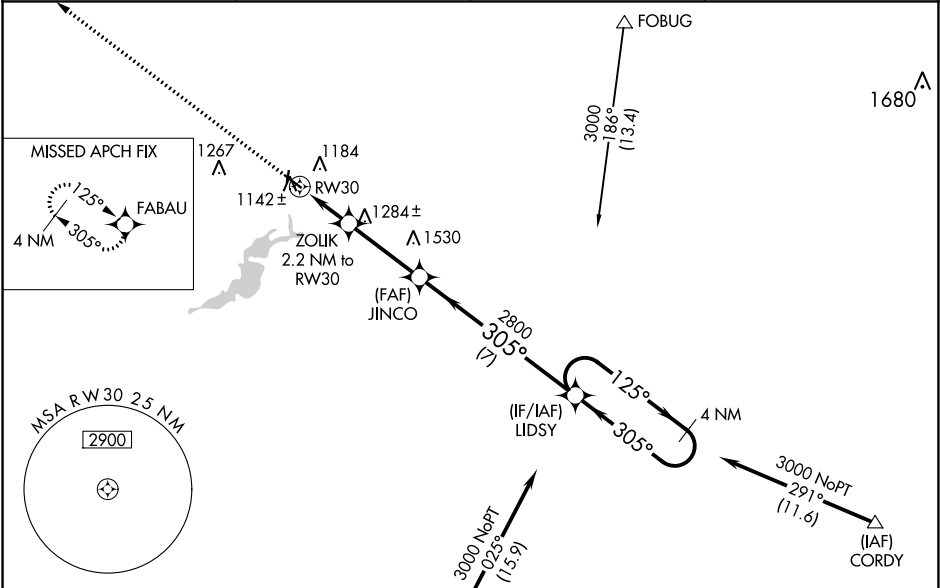

ELEV 1060	TDZE 1056
-----------	-----------

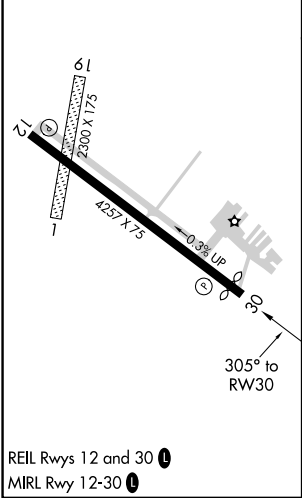

3000 ↑ FABAU	*LNAV only *1 NM to RW30 ZOLIK 2.2 NM to RW30 JINCO 2800 LIDSY 4 NM Holding Pattern 125° → 3000 ← 305° GP 3.00° TCH 40 1 NM 1.2 3.2 NM 7 NM				
CATEGORY	A		B	C	D
LPV DA	1306-1 250 (300-1)			NA	
LNAV/VNAV DA	1306-1 250 (300-1)			NA	
LNAV MDA	1400-1 344 (400-1)			NA	
CIRCLING	1520-1 460 (500-1)		1740-2 680 (700-2)		NA

NC-1, 18 APR 2024 to 16 MAY 2024

NC-1, 18 APR 2024 to 16 MAY 2024