

RNP APCH - GPS.

▼
▲ NA


Circling NA to Rwy 15 and 33. Rwy 11 helicopter visibility reduction below ¼ SM NA. Use Holland altimeter setting, when not received use Grand Rapids altimeter setting and increase all MDAs 40 feet and LNAV Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3000 direct WILAG and on track 013° to CEXED and track 326° to SAMME and hold, continue climb-in-hold to 3000.

BIV ASOS
119.025

GREAT LAKES APP CON ★
128.4 257.6

UNICOM
122.8 (CTAF) 0

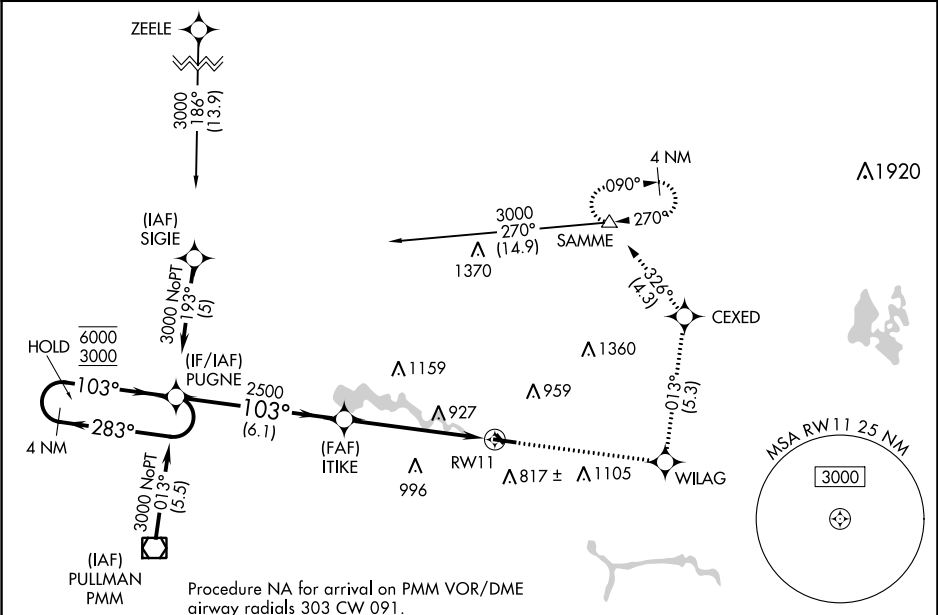

ELEV 706		TDZE 706		
4 NM Holding Pattern 6000 3000 ← 283° → 103° PUGNE 3000 WILAG tr 013° CEXED tr 326° SAMME ITIKE 2500 3.05° TCH 40 RW11 6.1 NM 5.4 NM				
CATEGORY	A	B	C	D
LNAV MDA	1220-1 514 (600-1)		1220-1⅓ 514 (600-1⅓)	NA
CIRCLING	1280-1 574 (600-1)	1320-1 614 (700-1)	1460-2¼ 754 (800-2¼)	NA

REIL Rwy 11 and 29
MIRL Rwy 11-29