

WAAS CH 57913 W33A	APP CRS 330°	Rwy Idg TDZE 831 Apt Elev 833
--	------------------------	---

RNAV (GPS) RWY 33



LAWRENCE RGNL (LWC)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Philip Billard Muni altimeter setting and increase LPV DA to 1083 feet, increase LNAV/VNAV DA to 1252 feet and all visibilities ¼ SM; increase all MDAs 60 feet and visibility Cat C ¼ SM. Baro-VNAV and VDP NA when using Philip Billard Muni altimeter setting.

MALSR

MISSED APPROACH:
Climb to 2700 direct
RIBCO and hold.

ASOS 121.225	KANSAS CITY CENTER 123.8 343.7	CLNC DEL 121.825	UNICOM 123.0 (CTAF) 1
------------------------	--	----------------------------	---------------------------------

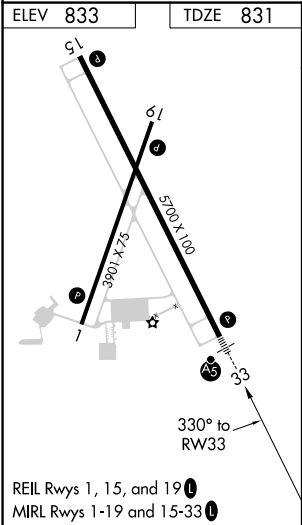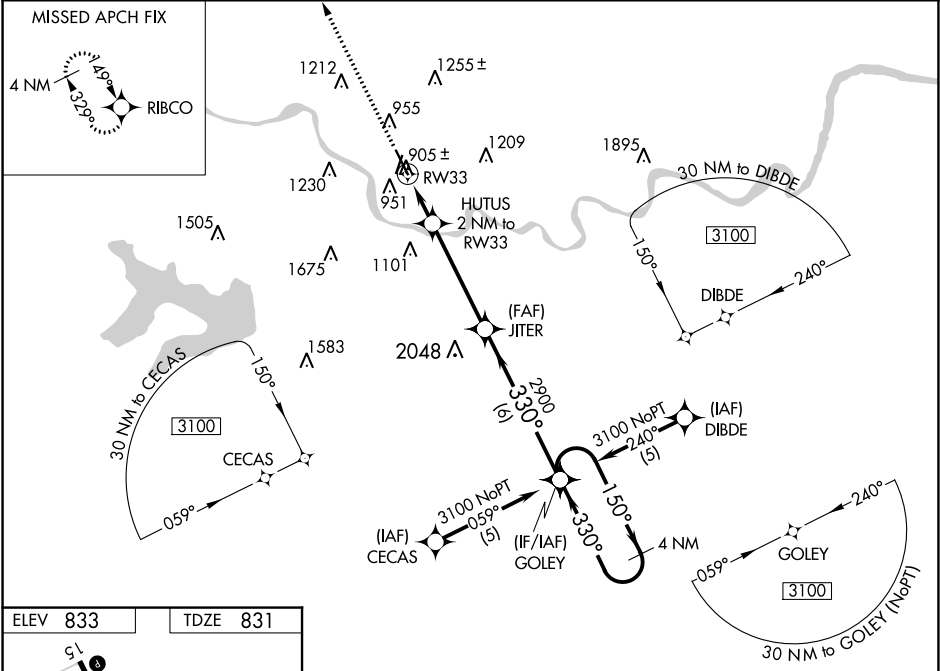

2700 RIBCO		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 52).	
*LNAV only		HUTUS 2 NM to RW33	
		JITER	
1.1 NM		GOLEY	
0.9		4 NM Holding Pattern	
4.2 NM		150° → 3100	
6 NM		← 330°	
CATEGORY		GP 3.00° TCH 55	
LPV DA		1031-½ 200 (200-½)	
LNAV/VNAV DA		1200-¾ 369 (400-¾)	
LNAV MDA		1220-½ 389 (400-½)	
CIRCLING		1420-1 587 (600-1) 1480-1 647 (700-1) 1620-2¼ 787 (800-2¼)	
		NA	