


|                                                 |                        |                                                             |
|-------------------------------------------------|------------------------|-------------------------------------------------------------|
| LOC/DME I-PGV<br><b>110.7</b><br>Chan <b>44</b> | APP CRS<br><b>197°</b> | Rwy Idg <b>6505</b><br>TDZE <b>25</b><br>Apt Elev <b>26</b> |
|-------------------------------------------------|------------------------|-------------------------------------------------------------|

ILS Z or LOC Z RWY 20  
PITT-GREENVILLE (PGV)


**NA** ADF required. VDP NA with Washington altimeter setting. When local altimeter setting not received use Washington altimeter setting and increase S-ILS 20 DA to 298 feet; increase all MDAs 60 feet and S-LOC 20 visibility Cat C/D 1/2 SM, and Circling visibility Cat D 1/4 SM. For inop ALS when using Washington altimeter setting, increase S-ILS 20 all Cats visibility 3/8 SM, and S-LOC 20 visibility Cat A/B 1/4 SM. Inop table does not apply to S-ILS all Cats. Rwy 20 helicopter visibility reduction below 3/4 SM NA. For inop ALS, increase S-LOC 20 visibility Cat A/B 1/4 SM, Cat C/D 3/8 SM.

**MALSR** MISSED APPROACH: Climb to 800 then climbing right turn to 1600 direct AQE NDB and hold.

|                          |                                           |                                 |
|--------------------------|-------------------------------------------|---------------------------------|
| AWOS-3<br><b>128.425</b> | WASHINGTON CENTER<br><b>123.85 279.65</b> | UNICOM<br><b>122.8 (CTAF) 0</b> |
|--------------------------|-------------------------------------------|---------------------------------|

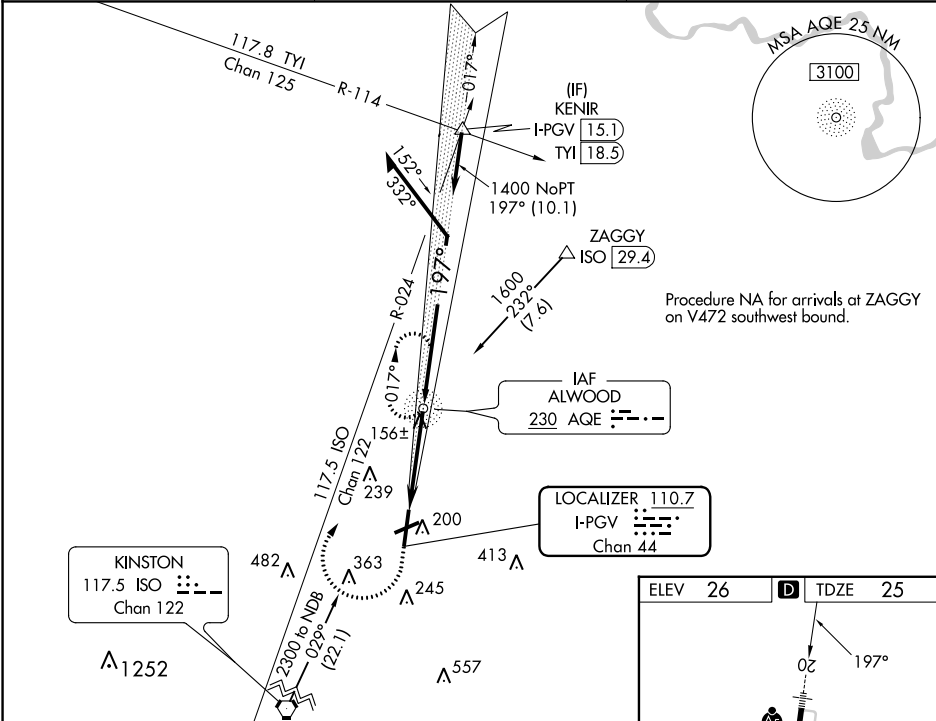

|                  |                      |                                  |                                         |                        |
|------------------|----------------------|----------------------------------|-----------------------------------------|------------------------|
| 800<br>↑         | 1600<br>↗            | AQE<br>                          |                                         |                        |
| * LOC only       |                      |                                  |                                         |                        |
| I-PGV<br>1.3<br> | * I-PGV<br>2.2<br>   | AQE NDB<br>1262<br>              |                                         |                        |
|                  |                      |                                  |                                         |                        |
| CATEGORY         | A                    | B                                | C                                       | D                      |
| S-ILS 20         |                      | 257- <sup>3</sup> / <sub>4</sub> | 231 (300- <sup>3</sup> / <sub>4</sub> ) |                        |
| S-LOC 20         |                      | 420- <sup>3</sup> / <sub>4</sub> | 394 (400- <sup>3</sup> / <sub>4</sub> ) |                        |
| CIRCLING         | 600-1<br>574 (600-1) | 620-1<br>594 (600-1)             | 700-2<br>674 (700-2)                    | 800-2½<br>774 (800-2½) |

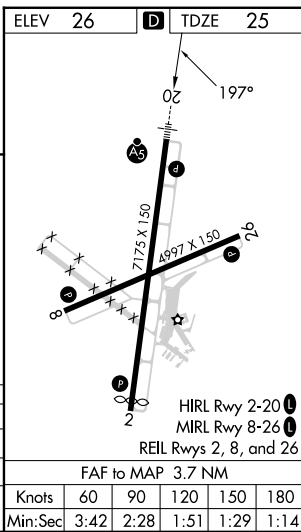

SE-2, 18 APR 2024 to 16 MAY 2024

SE-2, 18 APR 2024 to 16 MAY 2024