

LOC I-RUQ
109.95

APP CRS
202°

Rwy Idg
TDZE
Apt Elev
5501
772
772

ILS or LOC RWY 20
MID-CAROLINA RGNL (RUQ)

ADF required. When local altimeter setting not received, use Lexington altimeter setting and increase all DA 37 feet and all MDA 40 feet; increase S-LOC Cats C/D visibility 1/8 SM and Circling Cat D visibility 1/4 SM. For inop ALS when using Lexington altimeter setting, increase S-LOC 20 Cats C and D visibility to 1 3/4 mile.

MALSR
A5


MISSED APPROACH: Climb to 1600 then climbing right turn to 2900 direct ROVDY LOM and hold.

AWOS-3
118.175

CHARLOTTE APP CON
128.325 307.8

CLNC DEL
127.35

UNICOM
122.725 (CTAF)

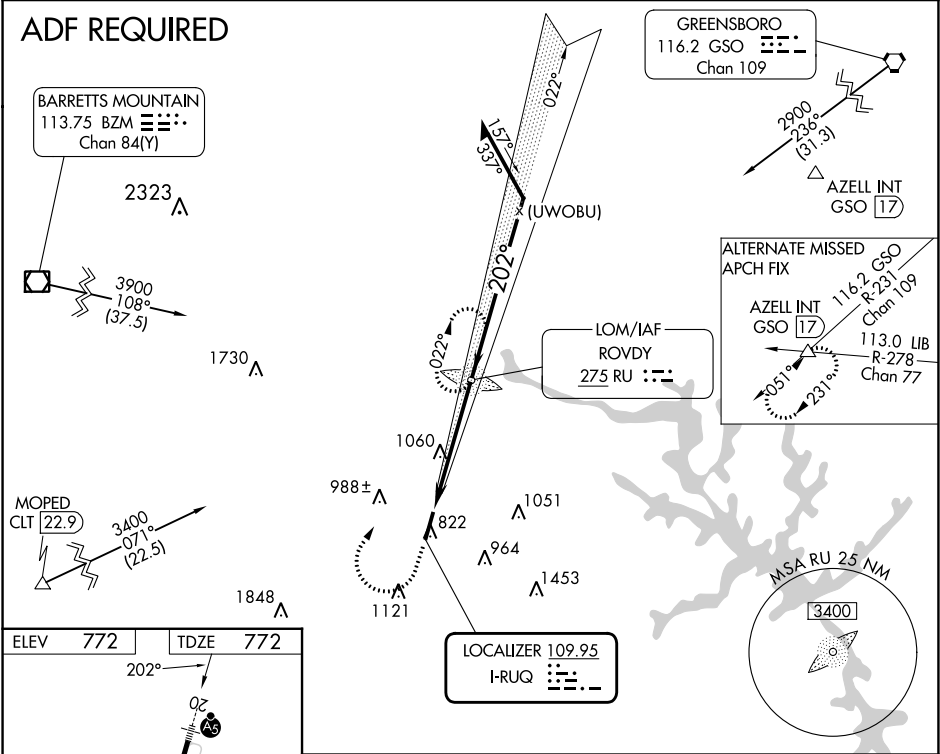

ELEV 772 TDZE 772

202°

5501 x 100

MIRL Rwy 2-20
REIL Rwys 2 and 20

FAF to MAP 5 NM

Knots	60	90	120	150	180
Min:Sec	5:00	3:20	2:30	2:00	1:40

1600 2900 ROVDY

ROVDY RU LOM

Remain within 10 NM

2422 022° 2500 202° 2500

GS 3.00° TCH 46

5 NM

CATEGORY	A	B	C	D
S-ILS 20	972-1 1/2		200 (200-1/2)	
S-LOC 20	1360-1 1/2 588 (600-1/2)		1360-1 1/4 588 (600-1 1/4)	
CIRCLING	1360-1 588 (600-1)		1440-2 668 (700-2)	