
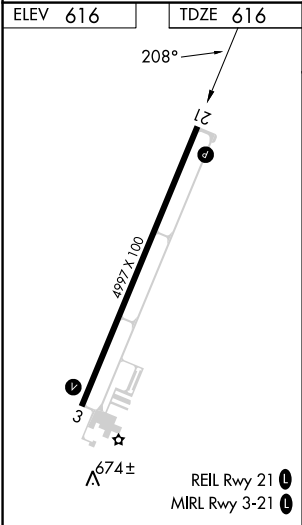


WAAS CH 86707 W21A	APP CRS 208°	Rwy Idg TDZE 616 Apt Elev 616
--	------------------------	---

RNAV (GPS) RWY 21
CUSTER (TTF)

RNP APCH - GPS. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 47°C. When local altimeter setting not received, use Detroit Metro Wayne County altimeter setting: increase LPV DA to 1011 feet; increase LNAV/VNAV DA 1054 feet; increase all MDAs 60 feet and visibility LNAV Cat C and Circling Cat C/D ¼ SM. Baro-VNAV and VDP NA when using Detroit Metro Wayne County altimeter setting. Circling to Rwy 3 NA at night.			MISSED APPROACH: Climb to 3000 direct CIVIK and on track 118° to GAKRE and on track 031° to MACCS and hold.
AWOS-3 119.075	DETROIT APP CON 134.3 363.2		UNICOM 122.7 (CTAF)

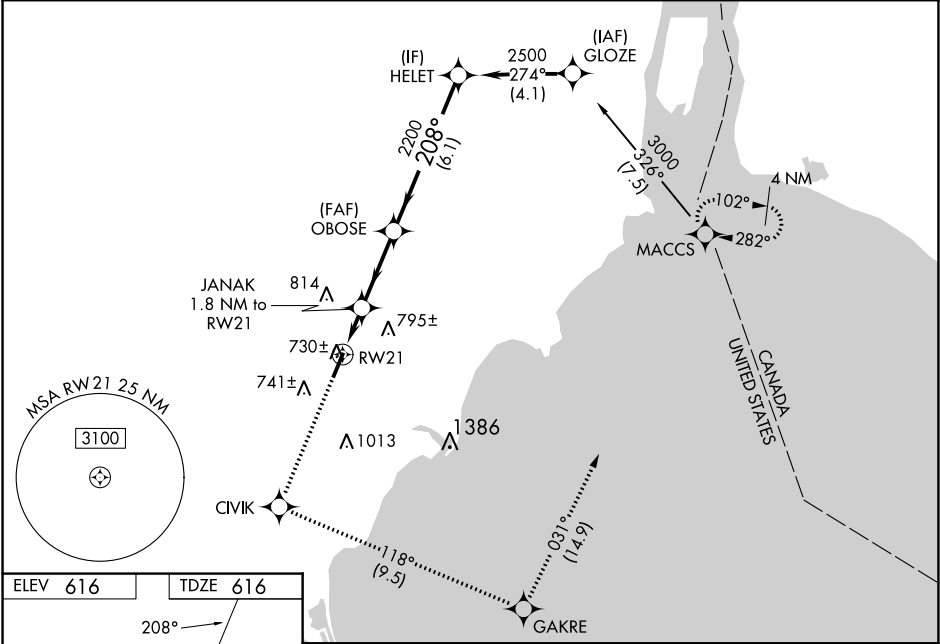

3000	CIVIK	tr 118°	GAKRE	tr 031°	MACCS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 49).		HELET
						OBOSE		
* LNAV only.		JANAK 1.8 NM to RW21		2200		208°		2500
		*0.9 NM to RW21		*1220		2200		GP 3.00° TCH 42
		0.9 NM		3 NM		6.1 NM		
CATEGORY		A		B		C		D
LPV	DA	966-1¼ 350 (400-1¼)						
LNAV/VNAV	DA	1009-1½ 393 (400-1½)						
LNAV MDA		980-1 364 (400-1)						980-1¼ 364 (400-1¼)
CIRCLING		1120-1 504 (600-1)	1180-1 564 (600-1)	1380-2¼ 764 (800-2¼)	1380-2½ 764 (800-2½)			