

WAAS
CH **97603**
W14A

APP CRS
135°


Rwy Idg
TDZE **327**
Apt Elev **327**

RNAV (GPS) RWY 14
EAST GEORGIA RGNL (SBO)

▼ Baro-VNAV and VDP NA when using Vidalia altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). When local altimeter setting not received, use Vidalia altimeter setting and increase LPV DA to 708 feet, LNAV/VNAV DA to 698 feet, and all MDA 80 feet; increase LPV and LNAV/VNAV all Cts visibility ¼ SM, LNAV Cts C/D visibility ⅓ SM, and Circling Cts C/D visibility ¼ SM. Rwy 14 helicopter visibility reduction below ¾ SM NA. DME /DME RNP-0.3 NA.

MISSED APPROACH:
Climb to 2500 direct
WINSI and hold.

AWOS-3 133.375	ATLANTA CENTER 127.95 343.75	UNICOM 122.975 (CTAF) 0
--------------------------	--	-----------------------------------

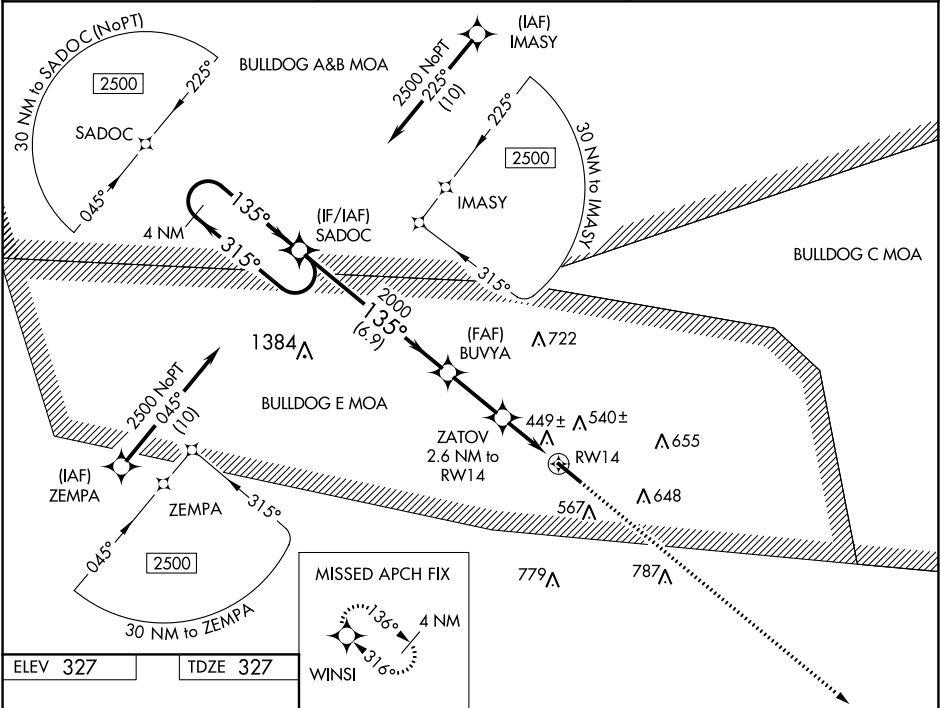

ELEV 327	TDZE 327
HIRL Rwy 14-32 0	
4 NM Holding Pattern	
SODOC	
2500	
GP 3.00° TCH 42	
BUYYA	
2000	
ZATOV	
2.6 NM to RW14	
*1180	
*11180	
RW14	
*LNAV only	
*1 NM to RW14	
6.9 NM	
2.5 NM	
1.6 NM	
1 NM	
CATEGORY	A
LPV DA	643-1
LNAV/VNAV DA	633-1
LNAV MDA	700-1
CIRCLING	900-1
	573 (600-1)
	920-1
	593 (600-1)
	1000-2
	673 (700-2)
	1000-2¼
	673 (700-2¼)