

PERRY, GEORGIA

AL-5882 (FAA)

23222

LOC I-PXE 109.15	APP CRS 005°	Rwy Idg TDZE Apt Elev	5004 417 418
----------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 36
PERRY-HOUSTON COUNTY (PXE)

	DME or RADAR required
--	-----------------------

▼ Autopilot coupled approach NA below 900. Rwy 36 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Inop table does not apply to S-LS-36. When local altimeter setting not received, use Middle Georgia Rgnl altimeter setting: increase all DA to 705 feet; increase all MDA to 40 feet and Circling visibility Cats C and D $\frac{1}{4}$ SM. For inop ALS, increase S-LOC 36 Cats A/B visibility to 1 SM and Cats C/D to $\frac{1}{8}$ SM. For inop ALS when using Middle Georgia Rgnl altimeter setting, increase S-LS all Cats visibility to $\frac{7}{8}$ SM and S-LOC 36 Cats A/B visibility to 1 SM.

MALSR




MISSED APPROACH: Climb to 1100 then climbing left turn to 2300 on heading 195° and VNA R-291 to SCTRY INT/ RADAR and hold.

AWOS-3
123.825

ATLANTA APP CON★
124.2 279.6

UNICOM
122.725 (CTAF) **L**

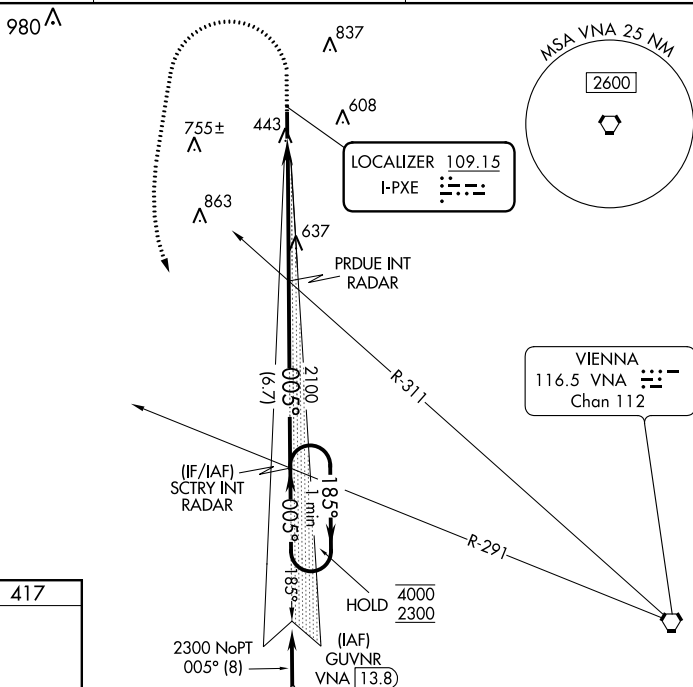

FIFV 418		TDZE 417
----------	--	----------

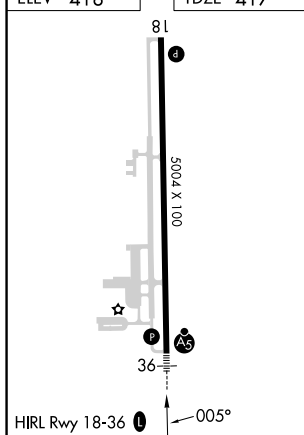


Diagram illustrating a One Minute Holding Pattern. The pattern is defined by a 180° turn. Key parameters and labels include:

- Initial heading: 1100
- Turn heading: 2300
- Turn angle: 195°
- VNA R-291
- SCTR INT
- VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 30).
- One Minute Holding Pattern
- SCTR INT RADAR
- PRDUE INT RADAR
- Altitude: 2100
- Heading: 005
- Heading: 185
- Altitude: 4000
- Altitude: 2300
- GS 3.00°
- TCH 45
- Distances: 5.2 NM, 6.7 NM

CATEGORY	A	B	C	D
S-ILS 36	667- ³ / ₄ 250 (300- ³ / ₄)			
S-LOC 36	900- ³ / ₄ 483 (500- ³ / ₄)		900-1 483 (500-1)	
C CIRCLING	900-1 482 (500-1)		1140-2 722 (800-2)	1280-2 ³ / ₄ 862 (900-2 ³ / ₄)

PERRY, GEORGIA
Amdt 1 08SEP22

32°31'N-83°46'W

PERRY-HOUSTON COUNTY (PXE)
ILS or LOC RWY 36

SE-4, 18 APR 2024 to 16 MAY 2024

SE-4, 18 APR 2024 to 16 MAY 2024