

WAAS CH 65641 W22A	APP CRS 217°	Rwy Idg 5500 TDZE 904 Apt Elev 904
--	------------------------	---

RNAV (GPS) RWY 22

BOLTON FLD (TZR)

⚠



⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using John Glenn Columbus Intl altimeter setting. DME/DME RNP-0.3 NA. When local altimeter setting not received use John Glenn Columbus Intl setting and increase LPV DA to 1196 feet and LNAV/VNAV DA to 1382 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1⁄8 SM, and LNAV Cat C/D visibility 1⁄4 SM.

MISSED APPROACH:
Climb to 2700 direct
WATIG and hold.

AWOS-3PT 135.925	COLUMBUS APP CON 134.0 279.6	BOLTON TOWER★ 128.1 (CTAF) 0	GND CON 121.8
----------------------------	--	--	-------------------------

RADAR REQUIRED

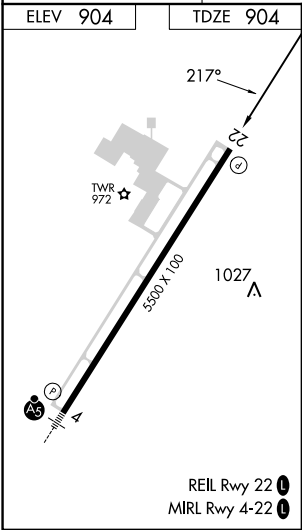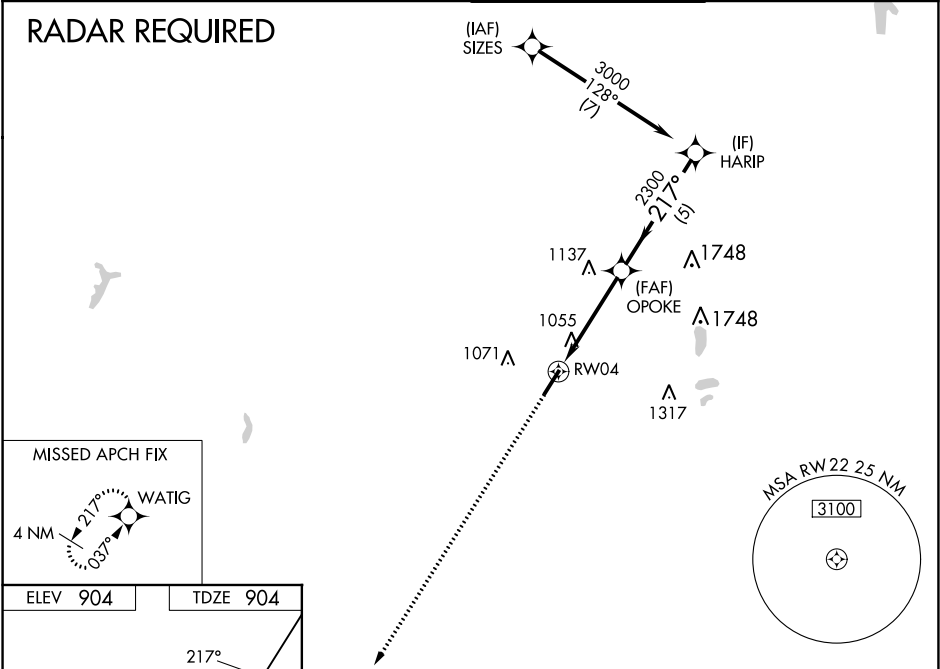

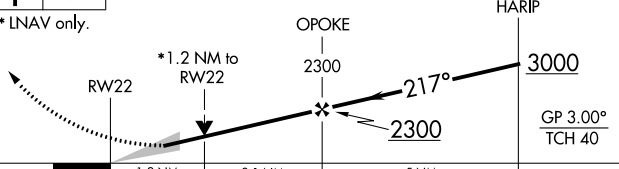2700	WATIG	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 25).			
					
* LNAV only.					
					
CATEGORY	A		B	C	D
LPV DA	1154-7 ⁸ / ₈ 250 (300-7 ⁸ / ₈)				
LNAV/ VNAV	DA		1339-1 ¹ / ₂ 435 (500-1 ¹ / ₂)		
LNAV MDA	1320-1 416 (500-1)		1320-1 ¹ / ₈ 416 (500-1 ¹ / ₈)		
 CIRCLING	1360-1 456 (500-1)		1380-1 476 (500-1)		1380-1 ¹ / ₂ 476 (500-1 ¹ / ₂) 1500-2 596 (600-2)