

WAAS CH 82739 W04A	APP CRS 047°	Rwy Idg TDZE 797 Apt Elev 800
--	------------------------	---

RNAV (GPS) RWY 4

CRAWFORDSVILLE RGNL (CFJ)

RNP APCH


▼

▲

Baro-VNAV NA when using Greencastle altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Greencastle altimeter setting: increase LPV DA to 1128 feet and all visibilities ¼ SM, LNAV/VNAV DA to 1118 feet and all visibilities ¼ SM; increase all MDA 60 feet and Circling Cats C and D visibilities ¼ SM. Rwy 4 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2700 direct CONUM and hold.

AWOS-3PT 125.65	INDIANAPOLIS APP CON 119.05 317.8	UNICOM 122.8 (CTAF) 0
---------------------------	---	---------------------------------

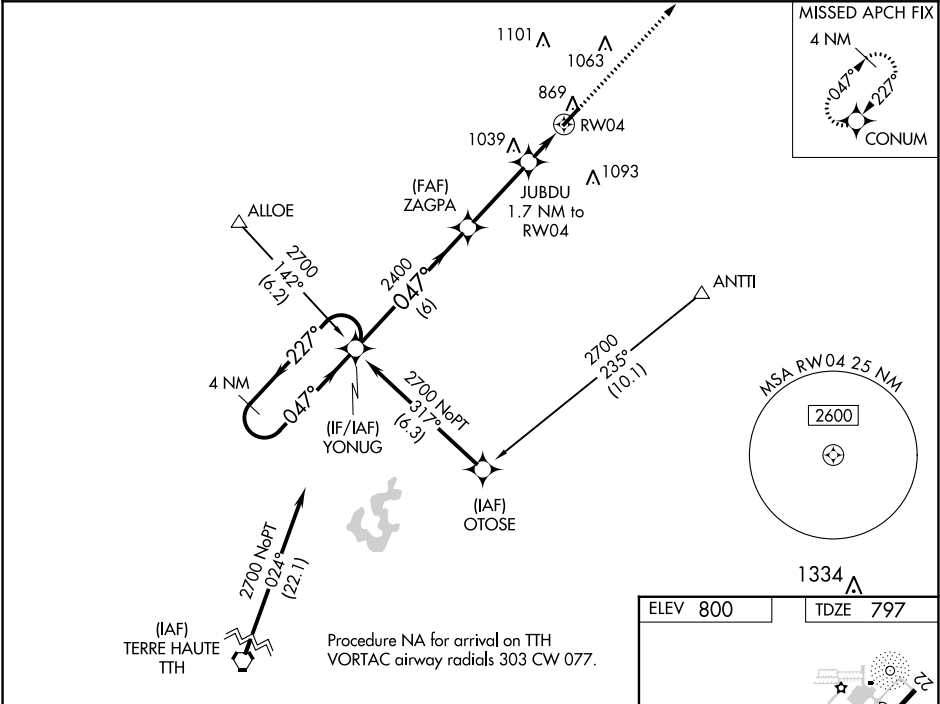

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00°/TCH 41°).		2700	CONUM
YONUG		ZAGPA	JUBDU 1.7 NM to RW04	*LNAV only.	
2700 ← 227° 047° →		2400	2400	*1380	
GP 3.00° TCH 50°		6 NM	3.2 NM	1.7 NM	
CATEGORY	A	B	C	D	
LPV DA	1076-7⁄8 279 (300-7⁄8)				
LNAV/VNAV DA	1066-7⁄8 269 (300-7⁄8)				
LNAV MDA	1240-1	443 (500-1)	1240-13⁄8	443 (500-13⁄8)	
CIRCLING	1240-1 440 (500-1)	1260-1 460 (500-1)	1440-13⁄4 640 (700-13⁄4)	1520-21⁄4 720 (800-21⁄4)	

