

APP CRS 311°	Rwy Idg TDZE Apt Elev	8373 523 607
------------------------	-----------------------------	---

RNAV (RNP) Z RWY 31R
DALLAS-FORT WORTH INTL (DFW)

T

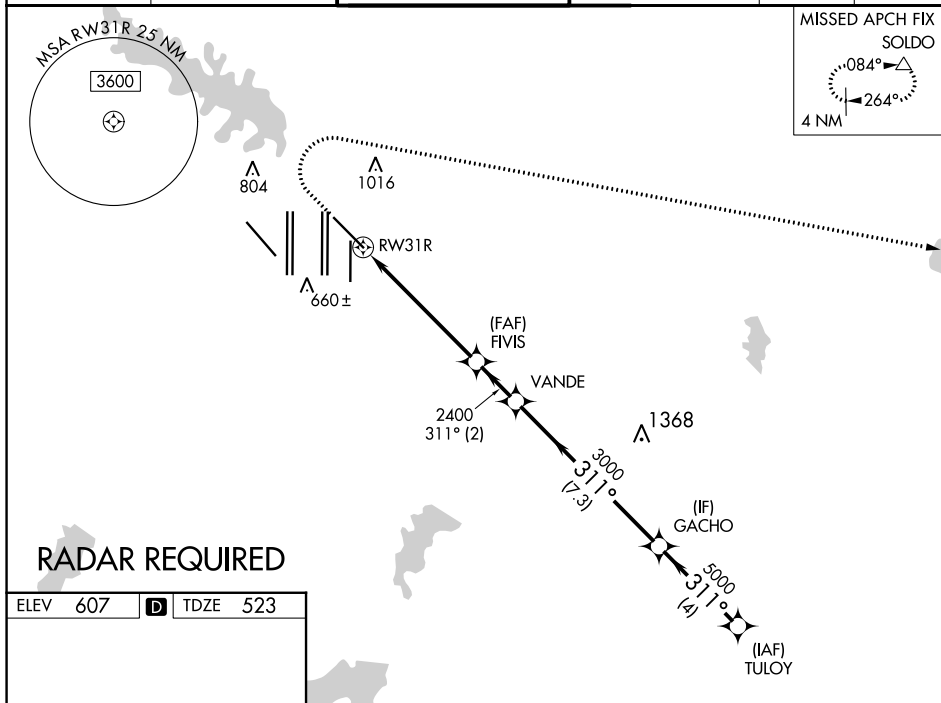
For uncompensated Baro-VNAV systems, procedure NA below -4°C (25°F) or above 54°C (130°F). For inop MALSR, increase RNP 0.14 all Cats visibility to RVR 5100, RNP 0.23 all Cats visibility to 1½ mile, RNP 0.30 all Cats visibility to 1½ mile. Simultaneous approach authorized with Rwy 31L. GPS Required. Use of FD or AP providing RNAV track guidance required during simultaneous operations.

MALSR



MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SOLD and hold.

D-ATIS	REGIONAL APP CON	DFW TOWER	GND CON	CINC DEL	CPDLC
ARR 123.775		126.55 127.5 EAST	121.65 121.8 EAST		
DEP 135.925	135.5 125.2	124.15 134.9 WEST	121.85 WEST	128.25	

[illegible]