


RNP APCH

⚠

When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 274 feet, LNAV/VNAV DA to 443 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility ¼ SM, LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Baro-VNAV and VDP NA when using Page Fld altimeter setting.

MISSED APPROACH: Climb to 2000 direct DOGLE and track 087° to JOCKS and hold.

ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
-------------------	--------------------------------------	---------------------------------------	-------------------	--------------------	---	-------------------

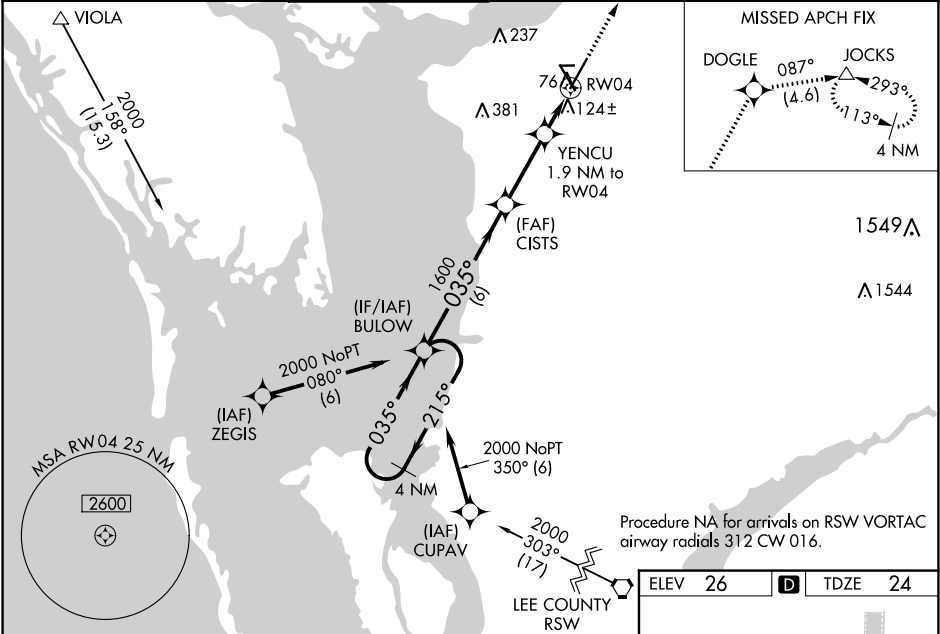

4 NM Holding Pattern

2000

GP 3.00°

TCH 50

BULOW

215°

035°

035°

1600

6 NM

2.9 NM

0.9 NM

1 NM

CISTS

1600

*680

RW04

*1 NM to RW04

YENCU

1.9 NM to RW04

DOGLE

tr 087°

JOCKS

*RNAV only.

CATEGORY	A	B	C	D
LPV DA	224-3/4 200 (200-3/4)			
LNAV/VNAV DA	393-1 369 (400-1)			
LNAV MDA	400-1 376 (400-1)			
CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1½ 574 (600-1½)	740-2¼ 714 (800-2¼)

510

2636 X 60

27

6280 X 150

7193 X 150

33

035°

HIRL Rwy 4-22

MIRL Rwy 15-33

REIL Rwy 4, 15, 22 and 33

TWR

159