

LOC/DME I-EKY 111.75 Chan 54 (Y)	APP CRS 053°	Rwy Idg TDZE Apt Elev 6007 700 700
--	------------------------	--


ILS or LOC RWY 5
BESSEMER (EKY)

NA

When local altimeter setting not received, use Alabaster altimeter setting and increase DA 41 feet, increase all MDAs 60 feet; increase S-LOC 5 Cat C visibility 1/8 SM and Cat D visibility 1/4 SM, increase Circling Cat C visibility 1/8 SM Cat D visibility 1/4 SM, increase JURAM fix S-LOC 5 Cat C visibility 1/8 SM and Cat D visibility 1/4 SM; increase Circling Cat D visibility 1/4 SM. VDP NA with Alabaster altimeter setting.

MISSED APPROACH: Climb to 1200 then climbing left turn to 3000 direct OKW VORTAC and hold.

AWOS-3PT 118.825	BIRMINGHAM APP CON 124.9 351.85	CLNC DEL 123.75	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------	--

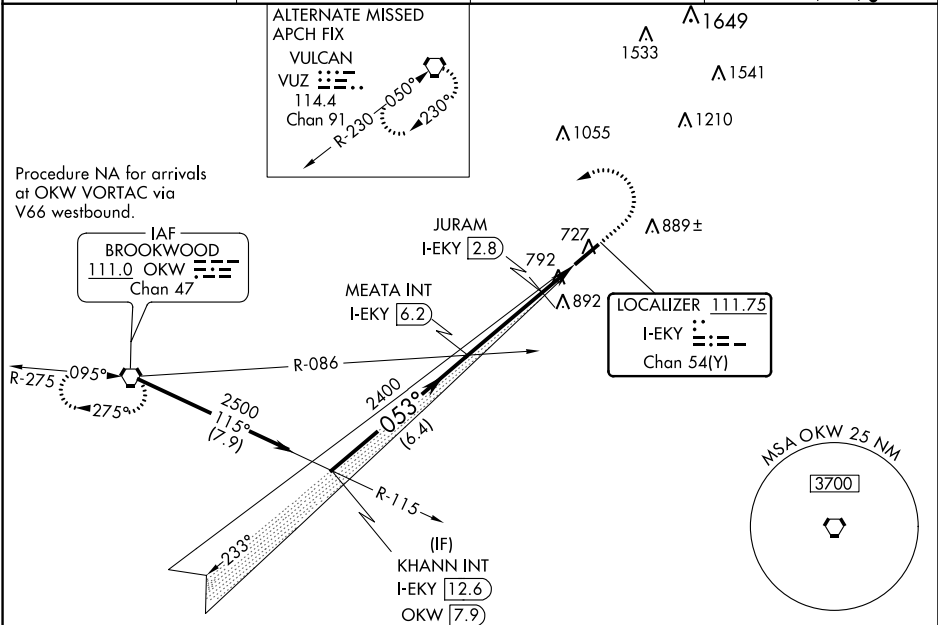

Procedure Turn NA

KHANN INT I-EKY 12.6

1260 when using Alabaster altimeter setting.

MEATA INT I-EKY 6.2

JURAM I-EKY 2.8

* I-EKY 2.2

I-EKY 1.2

* LOC only

GS 3.00° TCH 60

2500 053° 2400 2400

* 1200

6.4 NM 3.4 NM 0.6 NM 1.1 NM

ELEV 700 TDZE 700

053° 5.1 NM from FAF

HIRL Rwy 5-23 0

REIL Rwy 5 and 23 0

FAF to MAP 5.1 NM

Knots	60	90	120	150	180
Min:Sec	5:06	3:24	2:33	2:02	1:42

CATEGORY	A	B	C	D
S-ILS 5	900-3/4 200 (200-3/4)			
S-LOC 5	1200-1	500 (500-1)	1200-1 3/8 500 (500-1 3/8)	1200-1 1/2 500 (500-1 1/2)
CIRCLING	1200-1	500 (500-1)	1220-1 1/2 520 (600-1 1/2)	1320-2 620 (700-2)
JURAM FIX MINIMUMS				
S-LOC 5	1100-1	400 (400-1)	1100-1 1/8 400 (400-1 1/8)	1100-1 1/4 400 (400-1 1/4)
CIRCLING	1200-1	500 (500-1)	1220-1 1/2 520 (600-1 1/2)	1320-2 620 (700-2)

SE-4, 18 APR 2024 to 16 MAY 2024

SE-4, 18 APR 2024 to 16 MAY 2024