

WAAS CH 77513 W18A	APP CRS 175°	Rwy Idg 4201 TDZE 1428 Apt Elev 1432
--	------------------------	---

APP CRS
175°

Rwy Idg	4201
TDZE	1428
Apt Elev	1432

RNAV (GPS) RWY 18

WAYNE MUNI/STAN MORRIS FLD (LCG)

RNP APCH - GPS.

T Circling NA to Rwy 13 and 31. For uncompensated
A Baro-VNAV systems, LNAV/VNAV NA below -17°C
or above 54°C.

MISSED APPROACH: Climb to 3500 direct ERHOS and hold.

AWOS-3
120.125

SIOUX CITY APP CON ★
 124.6 307.0

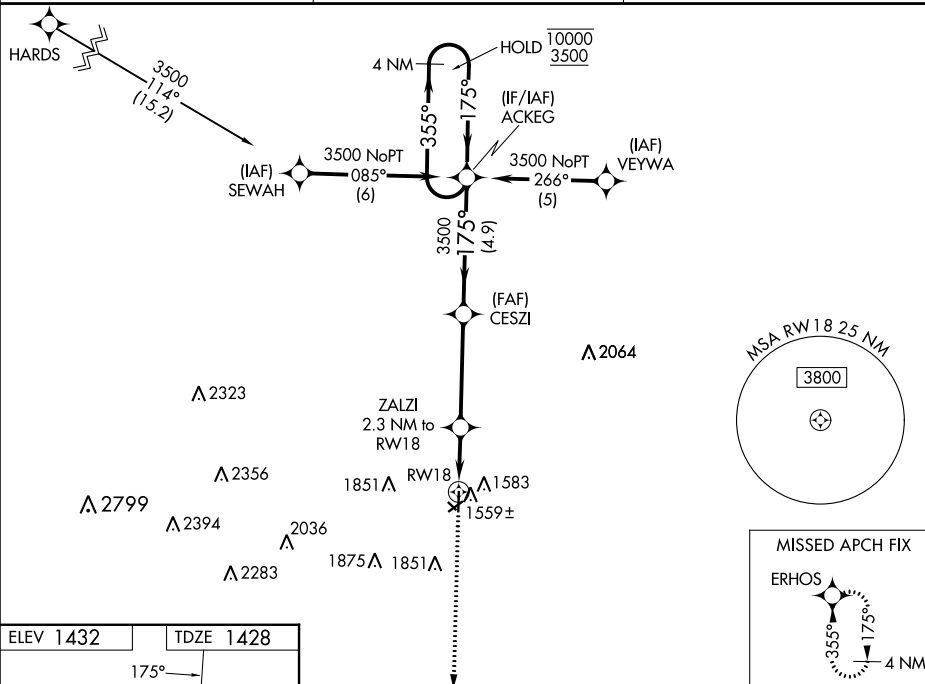
UNICOM
122.8 (CTAF) **L**

Diagram illustrating a 4 NM Holding Pattern for RW18. The pattern is oriented 350° (GP 3.00° TCH 41°). The holding pattern is 4 NM. The diagram shows the approach from the south, with a 1.1 NM turn to the left and a 1.2 NM turn to the right. The holding pattern is 4 NM. The diagram also shows the approach from the south, with a 1.1 NM turn to the left and a 1.2 NM turn to the right. The holding pattern is 4 NM. The diagram also shows the approach from the south, with a 1.1 NM turn to the left and a 1.2 NM turn to the right. The holding pattern is 4 NM.

CATEGORY	A	B	C	D
LPV DA	1678-1	250 (300-1)		NA
LNAV/VNAV	1678-1	250 (300-1)		NA
LNAV MDA	1820-1	392 (400-1)		NA
CIRCLING	2000-1	568 (600-1)		NA