

LOC I-IVI
111.1

APP CRS
058°

Rwy Idg
TDZE
Apt Elev
5500
2402
2419

ILS or LOC RWY 6R

RYAN FLD (RYN)

ADF required.

NA

Circling NA for Cat D north of Rwy 24R and east of Rwy 15.


MISSED APPROACH: Climb to 3000, then climbing right turn to 5000 via direct RBJ NDB and 305° bearing RBJ to DRIBB INT and hold.

ATIS
133.35

TUCSON APP CON
128.5 273.6

RYAN TOWER ★
125.8 (CTAF) 0

GND CON
118.2

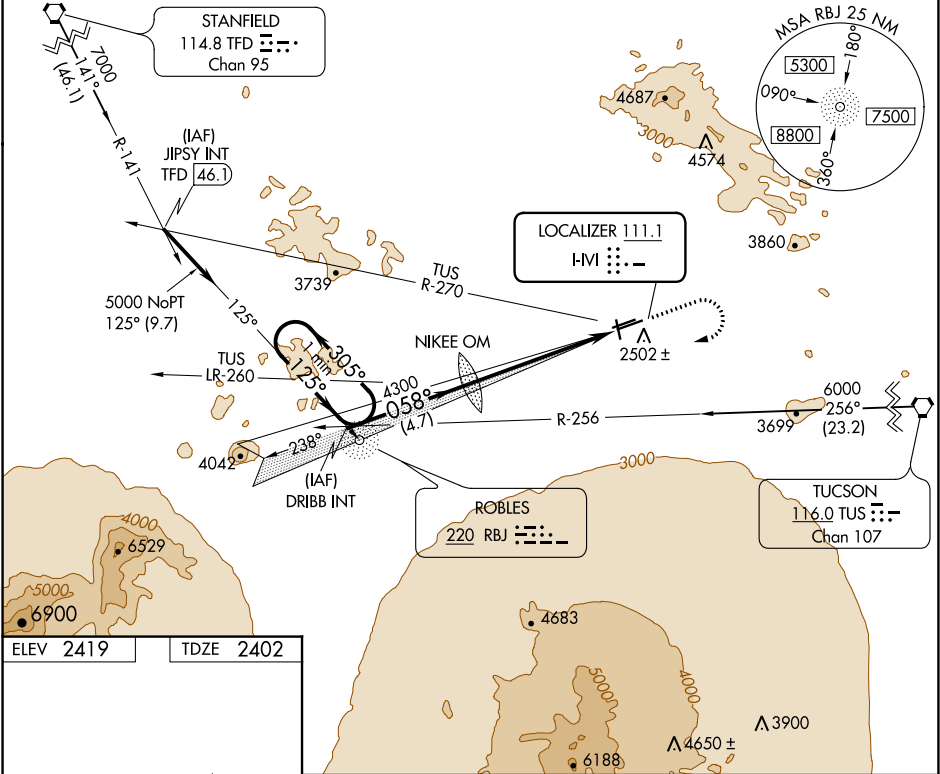

ELEV 2419

TDZE 2402

6L

6R 0.8 mi W

4900 X 75

5500 X 75

4000 X 75

24R

24L

33

2477

2484

TWR

MIRL Rwy 6L-24R
REIL Rwys 6R and 6L
MIRL Rwys 6R-24L and 15-33
FAF to MAP 5.1 NM

Knots

60

90

120

150

180

Min:Sec

5:06

3:24

2:33

2:02

1:42

One Minute Holding Pattern

DRIBB INT

3000

5000

RBJ

RBJ 305°

DRIBB INT

5000

305°

125°

058°

4262

4300

GS 3.00°

TCH 50

4.7 NM

5.6 NM

CATEGORY	A	B	C	D
S-ILS 6R	2652-1 250 (300-1)			
S-LOC 6R	2900-1 498 (500-1)	2900-1¼ 498 (500-1¼)	2900-1½ 498 (500-1½)	2900-1½ 498 (500-1½)
☒ CIRCLING	2960-1 541 (600-1)	3040-1¾ 621 (700-1¾)	3320-3 901 (1000-3)	