

WAAS
CH **65619**
W06A

APP CRS
058°

Rwy Idg **12000**
TDZE **27**
Apt Elev **30**

RNAV (GPS) RWY 6
SOUTHWEST FLORIDA INTL (RSW)


▼

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA.
For inoperative MALSR increase LPV all Cats visibility to RVR 5000, and LNAV Cat D visibility to RVR 6000.

MALSR

MISSED APPROACH: Climb to 2300 direct GALVE and via 122° track to RUTHY and right turn via 213° track to CORFU and hold.

D-ATIS 124.65	FORT MYERS APP CON ★ 125.15 306.2 (RWY 6) 126.8 306.2 (RWY 24)	FORT MYERS TOWER ★ 128.75 (CTAF) 0 257.8	GND CON 121.9 257.8	CLNC DEL 132.075	UNICOM 122.95
-------------------------	--	---	-------------------------------	----------------------------	-------------------------

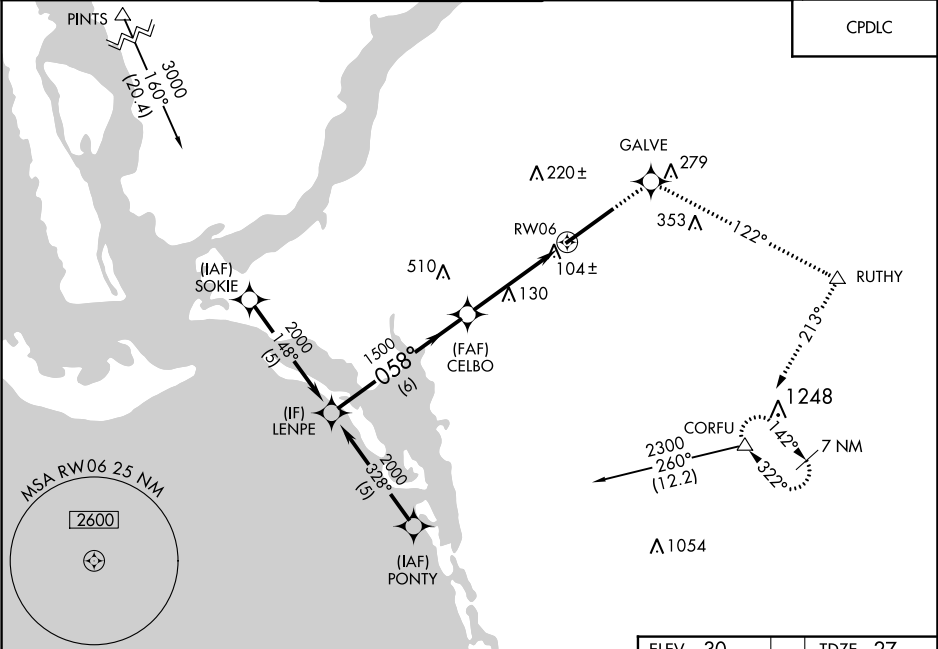

Procedure Turn NA

LENPE

2000

GP 3.00° TCH 55

CELBO

1500

058°

6 NM

3.3 NM

1.1 NM

RW06

*LNAV only.

*1.1 NM to RW06

ELEV 30

TDZE 27

2300

GALVE

tr 122°

RUTHY

tr 213°

CORFU

TWR 168

83

058° to RW06

REIL Rwy 24

TDZ/CL Rwy 6

HIRL Rwy 6-24

CATEGORY	A	B	C	D
LPV DA	330/24		303 (300-½)	
LNAV/VNAV DA	380/40		353 (400-¾)	
LNAV MDA	440/24	413 (500-½)	440/40 413 (500-¾)	440/50 413 (500-1)
CIRCLING	500-1	470 (500-1)	580-1½ 550 (600-1½)	660-2 630 (700-2)