


WAAS CH 73007 W30A	APP CRS 299°	Rwy Idg TDZE Apt Elev	5500 2432 2432
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 30

CALDWELL EXEC (EUL)

RNP APCH.	MISSED APPROACH: Climb to 5000 direct REDVE and hold.
Rwy 30 helicopter visibility reduction below ¾ SM NA. Baro-VNAV NA when using Boise altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 44°C. When local altimeter setting not received, use Boise altimeter setting and increase all DA/MDA 120 feet and all visibilities ½ mile.	

AWOS-3PT 135.075	BIG SKY APP CON 119.6 269.4	UNICOM 123.0 (CTAF) 0
----------------------------	---------------------------------------	--

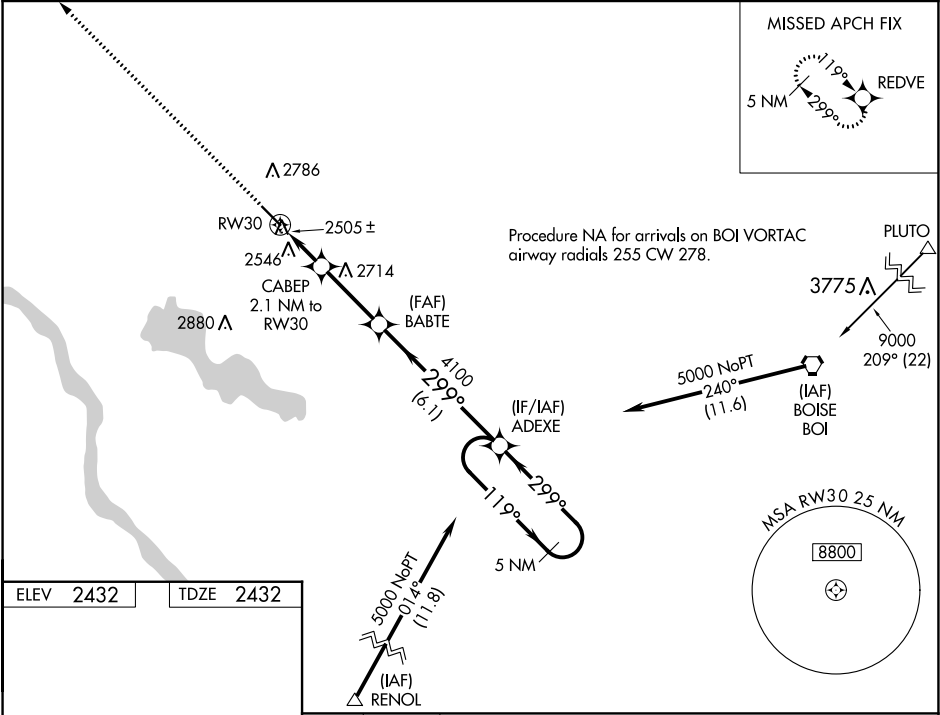

MIRM Rwy 12-30

5000

REDVE

*LNAV only

RW30

CABEP 2.1 NM to RW30

BABTE

ADEXE

5 NM Holding Pattern

299°

119°

299°

5000

GP 3.00°

TCH 45°

2.1 NM

2.9 NM

6.1 NM

CATEGORY	A	B	C	D
LPV DA	2687-1		255 (300-1)	
LNAV/VNAV DA	2822-1¼		390 (400-1¼)	
LNAV MDA	2880-1	448 (500-1)	2880-1⅜ 448 (500-1⅜)	2880-1½ 448 (500-1½)