

LOC/DME I-VWT 110.9 Chan 46	APP CRS 352°	Rwy ldg TDZE Apt Elev 8000 5515 5515
---	------------------------	--

ILS or LOC RWY 35



COLORADO AIR AND SPACE PORT (CFO)

For inop ALS, increase S-LOC 35 Cats C and D visibility to 2½ SM.

MALSR

MISSED APPROACH: Climb to 7500 on heading 352° and on GLL VOR/DME R-164 to PHLAT INT/DVV 6.6 DME and hold.

ATIS 119.025	DENVER APP CON 128.25 371.95	SPACE PORT TOWER ★ 120.2 (CTAF) 1	GND CON 124.7	CLNC DEL 124.7	CLNC DEL 121.75 (When twr closed)	UNICOM 122.95
------------------------	--	--	-------------------------	--------------------------	--	-------------------------

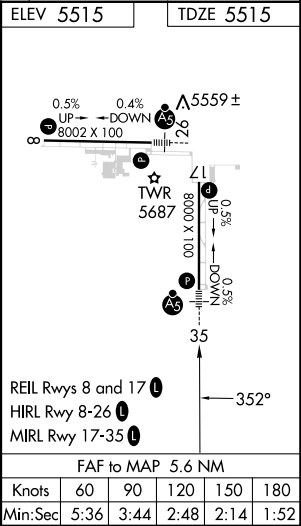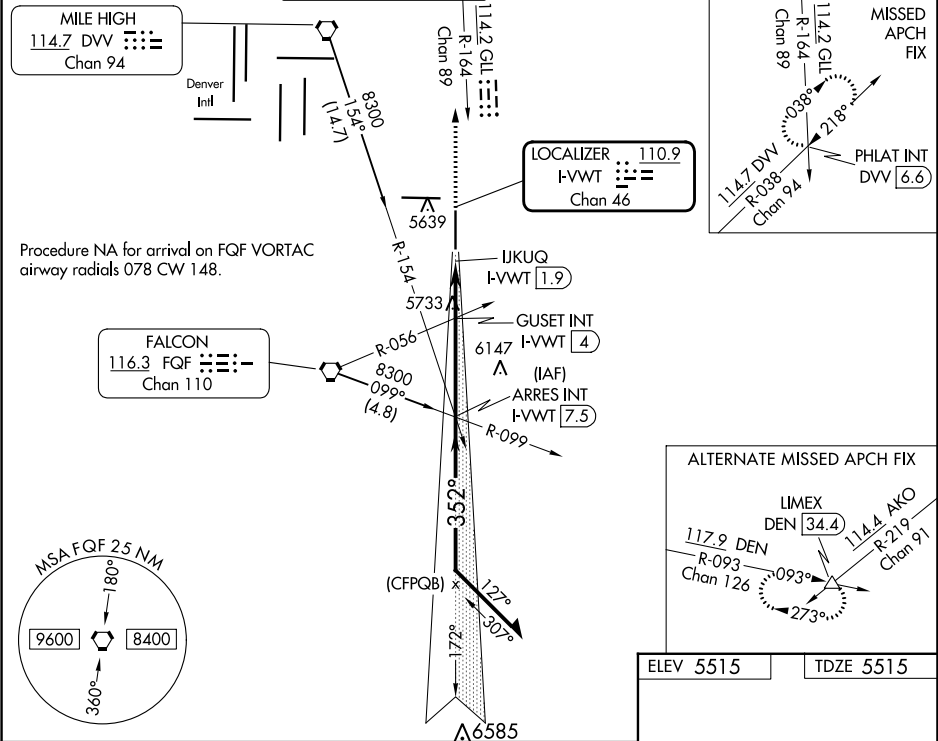

7500	GLL R-164	PHLAT INT	ARRES INT I-VWT 7.5	Remain within 10 NM
hdg 352°				
*LOC only				
IJQUQ I-VWT 1.9				
*I-VWT 3				
GUSSET INT I-VWT 4				
6300*				
6300				
7500				
7900				
GS 3.00°				
TCH 54				
0.5	1 NM	1 NM	3.6 NM	
CATEGORY	A	B	C	D
S-ILS 35	5715-½	200 (200-½)		
S-LOC 35	6300-½ 785 (800-½)	6300-¾ 785 (800-¾)	6300-1¾ 785 (800-1¾)	
GUSSET FIX MINIMUMS (DUAL VOR RECEIVERS OR DME REQUIRED)				
S-LOC 35	6040-½	525 (600-½)	6040-1	525 (600-1)