


WAAS CH 53619 W28A	APP CRS 284°	Rwy Idg 4000 TDZE 881 Apt Elev 881
--	------------------------	---

RNAV (GPS) RWY 28

FULTON COUNTY (NY)

RNP APCH - GPS.	MISSED APPROACH: Climb to 5000 direct ASQEV and hold, continue climb-in-hold to 5000.
Rwy 28 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.	

AWOS-3 119.225	ALBANY APP CON 118.05	UNICOM 122.7 (CTAF) 0
--------------------------	---------------------------------	---------------------------------

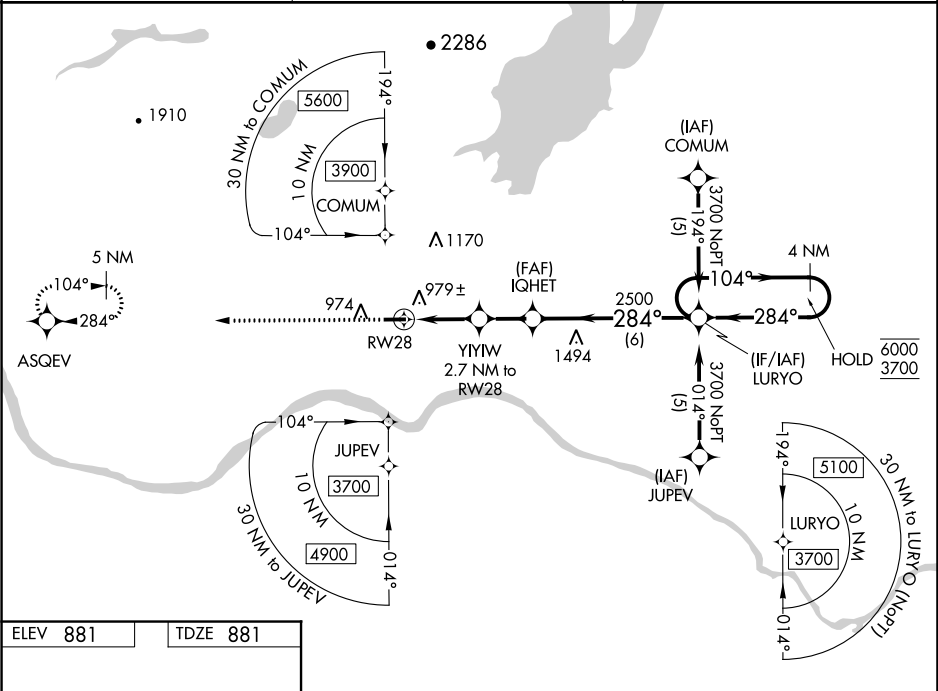

ELEV 881	TDZE 881
5000 ASQEV	VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 40).
10 0.4% UP 82	1 NM 1.7 NM 1.9 NM 6 NM
284° to RW28	GP 3.20° TCH 52
MIRL Rwy 10-28 0	
REIL Rws 10 and 28 0	
CIRCLING	