

WAAS CH 93924 W36A	APP CRS 005°	Rwy Idg 3499 TDZE 246 Apt Elev 247
--	------------------------	---

RNAV (GPS) RWY 36

CHARLES W BAKER (2M8)


▼

▲ NA

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Millington/Memphis altimeter setting and increase LPV DA to 610 feet; increase LNAV/VNAV DA to 713 feet; increase all MDAs 40 feet and LNAV Cat C visibility ⅓ SM and Circling Cat C visibility ¼ SM. Rwy 36 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Millington/Memphis altimeter setting. Circling Rwy 18 NA at night.

MISSED APPROACH:
Climb to 3000 direct OZSOM and hold, continue climb-in-hold to 3000.

AWOS-3PT 119.575	MEMPHIS APP CON 125.8 338.3	UNICOM 122.8 (CTAF)
----------------------------	---------------------------------------	-------------------------------

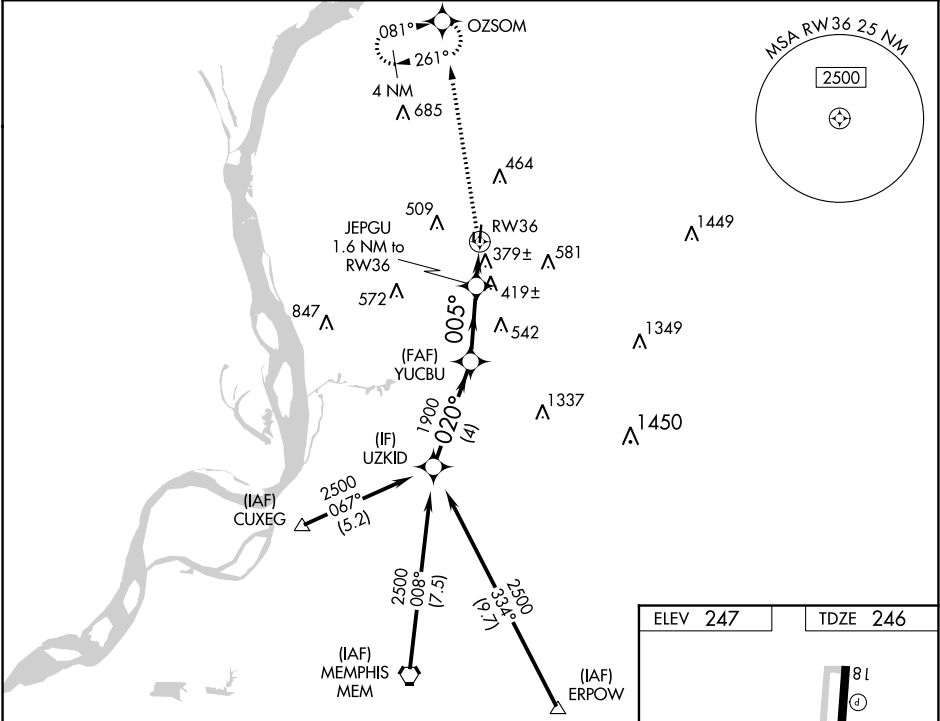

UZKID		VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 40).		3000	OZSOM
2500		1900		*LNAV only.	
GP 3.50° TCH 53		020°		005°	
4 NM		2.7 NM		0.9 NM	
CATEGORY	A	B	C	D	
LPV DA	586-1	340 (400-1)		NA	
LNAV/VNAV DA	689-1⅜	443 (500-1⅜)		NA	
LNAV MDA	680-1	434 (500-1)	680-1¼ 434 (500-1¼)	NA	
CIRCLING	760-1 513 (600-1)	860-1 613 (700-1)	900-1¾ 653 (700-1¾)	NA	

