


VOR/DME PNT	APP CRS	Rwy Idg	5000
109.6	217°	TDZE	666
Chan 33		Apt Elev	666

VOR RWY 24
PONTIAC MUNI (PNT)

⚠ When local altimeter setting not received, use Bloomington/Normal altimeter setting and increase all MDAs 100 feet; increase S-24 and Circling Cat C visibility ½ SM, and increase JUDUS fix minimums S-24 Cat C visibility ¼ SM and Circling Cat C ½ SM.

MISSED APPROACH: Climb to 3000 direct PNT VOR/DME and hold.

AWOS-3 119.675	CHICAGO CENTER 123.75 259.1	UNICOM 123.075 (CTAF) 0
-------------------	--------------------------------	----------------------------

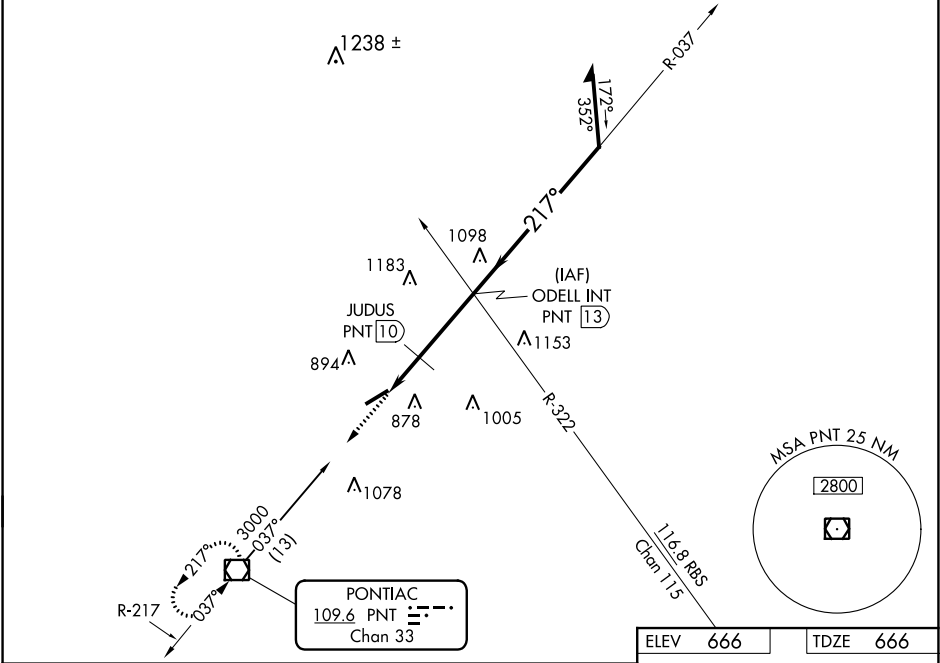

3000 PNT 109.6

*1340 when using Bloomington/Normal altimeter setting.

ODELL INT PNT 13

Remain within 10 NM

217° 2300

1240 * 3.23° TCH 35°

VGSI and descent angles not coincident (VGSI Angle 3.00°/TCH 35°).

1.7 NM 3 NM

CATEGORY	A	B	C	D
S-24	1240-1	574 (600-1)	1240-1½ 574 (600-1½)	NA
CIRCLING	1240-1	574 (600-1)	1320-1¾ 654 (700-1¾)	NA
JUDUS FIX MINIMUMS				
S-24	1140-1	474 (500-1)	1140-1¼ 474 (500-1¼)	NA
CIRCLING	1180-1 514 (600-1)	1200-1 534 (600-1)	1320-1¾ 654 (700-1¾)	NA

ELEV 666 TDZE 666

217°

5000 X 75

0.3% UP

MIRL Rwy 6-24 0

FAF to MAP 4.7 NM

Knots	60	90	120	150	180
Min:Sec	4:42	3:08	2:21	1:53	1:34