

WAAS CH 40310 W14A	APP CRS 142°	Rwy Idg 4300 TDZE 21 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 14

NORTH PALM BEACH COUNTY GENERAL AVIATION (F45)


⚠

NA

Circling NA to Rwy's 9L and 27R. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter not received, use Palm Beach Intl altimeter setting and increase LPV DA to 352 feet; increase LNAV/VNAV DA to 412 feet and all visibilities ½ SM; increase all MDA 40 feet and LNAV Cats C/D visibility ½ SM. Rwy 14 helicopter visibility reduction below ¾ SM NA. Baro-VNAV and VDP NA when using Palm Beach Intl altimeter setting.

MISSED APPROACH:
Climb to 2300 direct
YADUD and on track
069° to WOPDU and
hold.

AWOS-3 119.975	PALM BEACH APP CON 128.3 317.4	CLNC DEL 120.825	UNICOM 123.075 (CTAF) 0
--------------------------	--	----------------------------	-----------------------------------

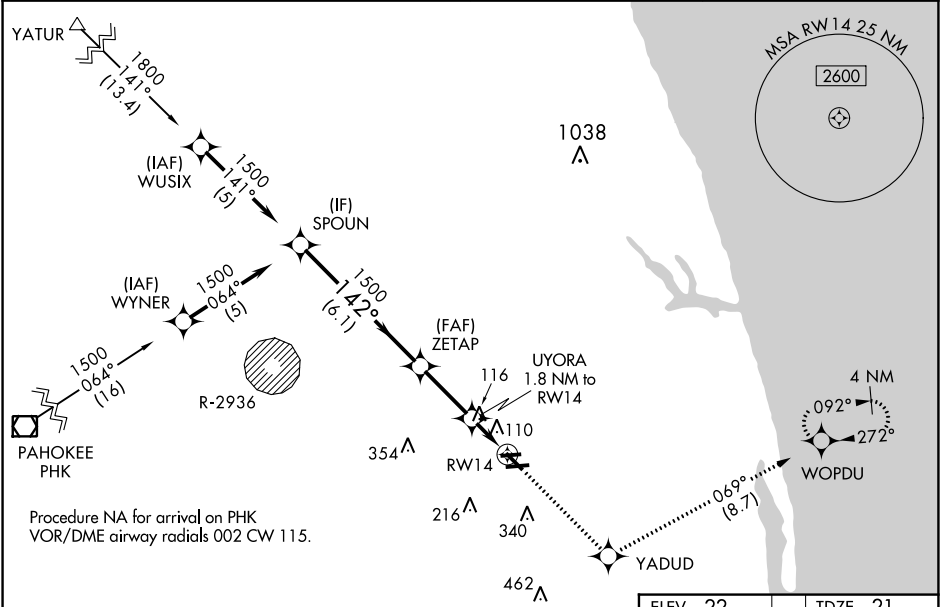

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 40).		2300	YADUD	tr 069°	WOPDU
		*LNAV only.			
GP 3.04° TCH 51					
CATEGORY	A	B	C	D	
LPV DA		324-7/8	303 (400-7/8)		
LNAV/VNAV DA		384-1	363 (400-1)		
LNAV MDA		380-1	359 (400-1)		
CIRCLING	460-1 438 (500-1)	480-1 458 (500-1)	700-2 678 (800-2)	720-2 1/4 698 (700-2 1/4)	MIRL Rwy's 9R-27L and 14-32 REIL Rwy's 9R, 14, 27L and 32