

WAAS CH 56309 W03A	APP CRS 029°	Rwy Idg 5498 TDZE 940 Apt Elev 948
--	------------------------	---




RNAV (GPS) RWY 3

GEORGETOWN-SCOTT COUNTY RGNL (27K)

T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Lexington altimeter setting and increase LPV DA to 1178, LNAV/VNAV DA to 1413, and all MDA 40 feet; increase LPV and LNAV/VNAV visibility all Cats and LNAV Cat C and Circling Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Lexington altimeter setting.

MISSED APPROACH: Climb to 3000 direct ETOXY and left turn on track 281° to GENUS and hold.

AWOS-3 119.975	LEXINGTON APP CON 120.15 259.3 (040° - 220°) 120.75 298.9 (221° - 039°)				CLNC DEL 127.425	UNICOM 123.0 (CTAF) ①
--------------------------	---	--	--	--	----------------------------	---------------------------------

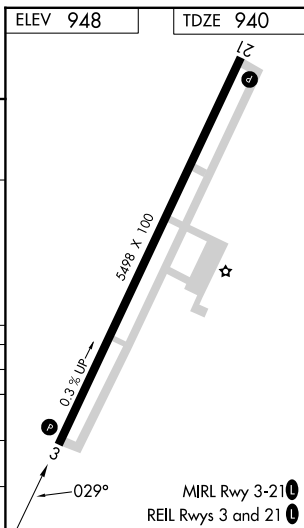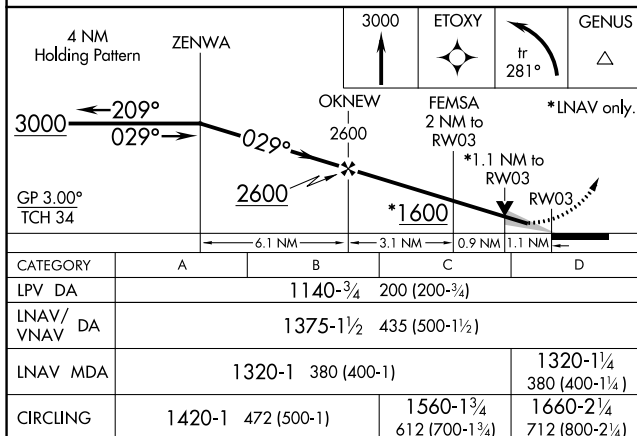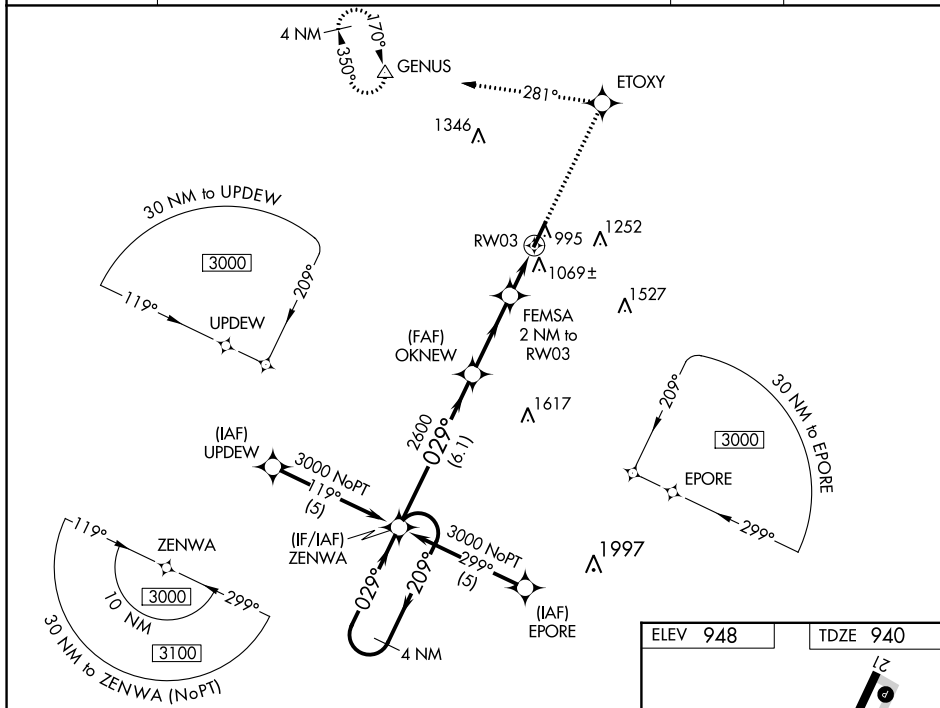

RNAV (GPS) RWY 3