

▼

▲ NA

DME required.
When local altimeter setting not received, use Lexington altimeter setting and increase all MDA 40 feet; increase Circling Cat D visibility ¼ mile.


MISSED APPROACH: Climbing left turn to 3000 direct HYK VOR/DME and hold.

AWOS-3
119.975

LEXINGTON APP CON
120.15 259.3 (040°-220°) 120.75 298.9 (221°-039°)

CINC DEL
127.425

UNICOM
123.0 (CTAF) 0

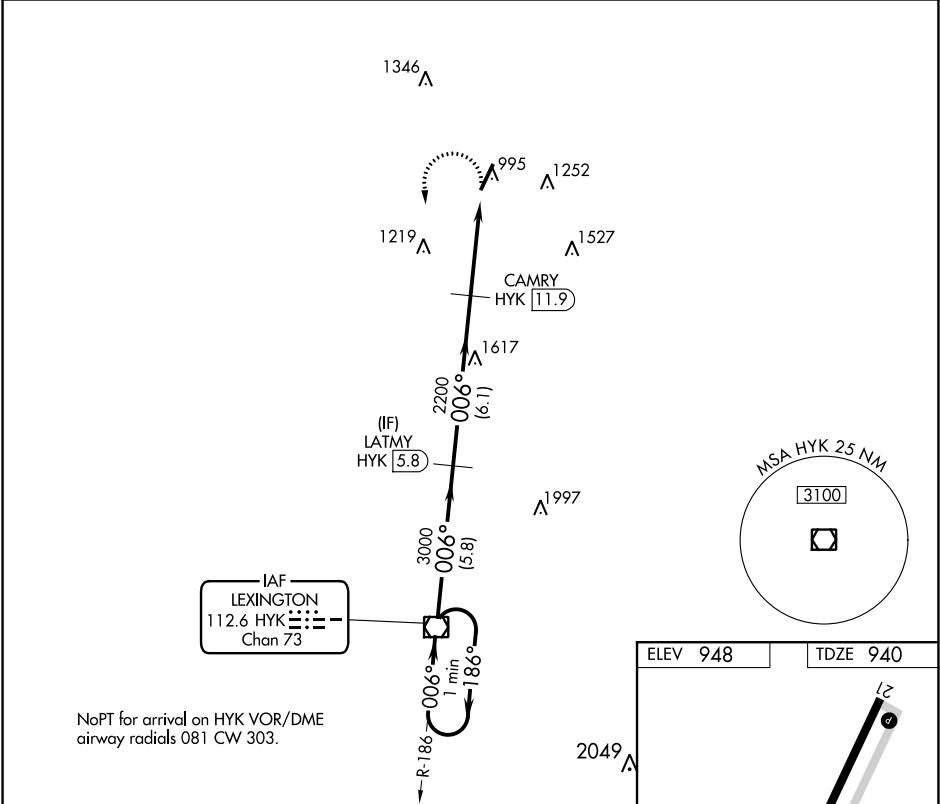

One Minute Holding Pattern				HYK VOR/DME		LATMY HYK 5.8		CAMRY HYK 11.9		HYK 15.7	
3000				186°		006°		3000		006°	
3000				5.8 NM		6.1 NM		3.8 NM		2200	
CATEGORY				A		B		C		D	
S-3				1480-1		540 (600-1)		1480-1½ 540 (600-1½)		1480-1¾ 540 (600-1¾)	
CIRCLING				1480-1		532 (600-1)		1560-1¾ 612 (700-1¾)		1660-2¼ 712 (800-2¼)	

