

LOC/DME I-TT 110.75 Chan 44 (Y)	APP CRS 029°	Rwy Idg 6501 TDZE 247 Apt Elev 247
---	------------------------	---

ILS Y or LOC Y RWY 3
RALEIGH EXEC JETPORT AT SANFORD-LEE COUNTY (TTA)

RNAV 1-GPS required

RNAV 1-GPS or RADAR required for procedure entry.



When local altimeter setting not received, use Raleigh/Durham altimeter setting:
 increase DA to 527 feet; increase all MDAs 100 feet and Cat D's Cats C and D
 visibility to 1 SM and Circling Cat C visibility to 2 SM and Cat D to 2½ SM.
 For inop ALS, decrease S-LOC 3 Cats C and D visibility to 1 SM. For inop ALS
 when using Raleigh/Durham altimeter setting, increase S-LS 3 all Cats visibility
 to ½ SM and increase S-LOC 3 Cats C and D visibility to 1½ SM. VDP NA
 when using Raleigh/Durham altimeter setting.

MALSR




MISSED APPROACH: Climb to 1300 then climbing left turn to 2100 direct IKTOW INT/I-TTA 12.2 DME/RADAR and hold.

AWOS-3 120.625	RALEIGH APP CON 125.3 353.675	UNICOM 123.075 (CTAF) 0	GCO 135.075
--------------------------	---	-----------------------------------	-----------------------

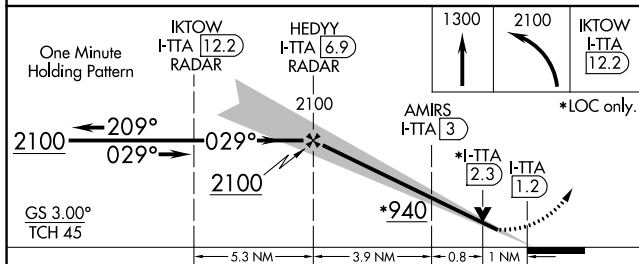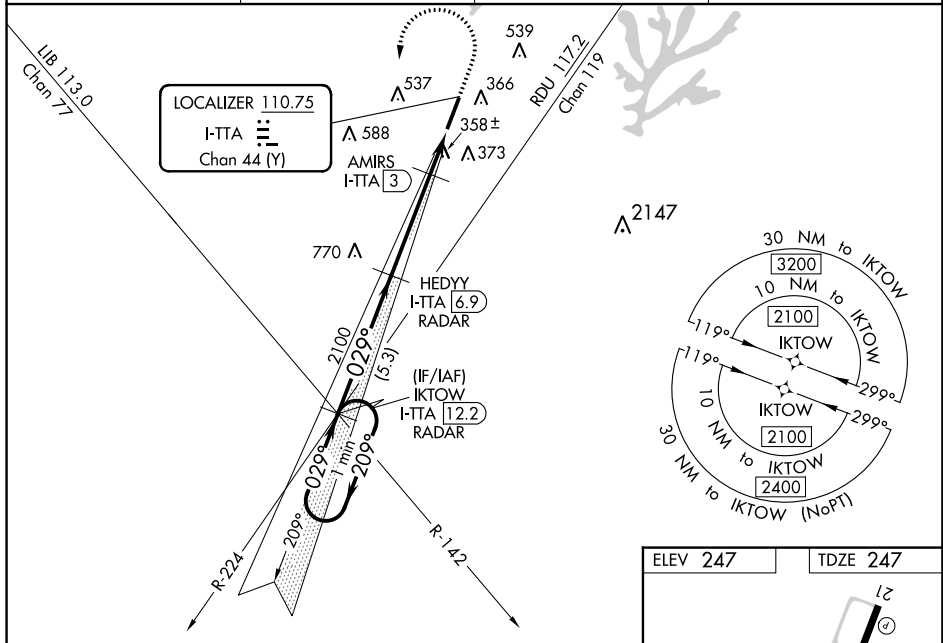

CATEGORY	A	B	C	D
S-ILS 3	447-1½ 200 (200-½)			
S-LOC 3	620-½ 373 (400-½)		620-5⁄8 373 (400-5⁄8)	
 CIRCLING	760-1 513 (600-1)	820-1 573 (600-1)	840-1½ 593 (600-1½)	960-2¼ 713 (800-2¼)

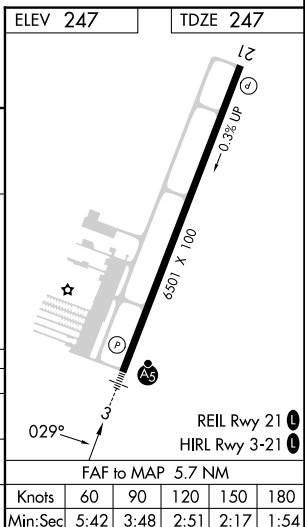

ILS Y or LOC Y RWY 3