



APP CRS	Rwy Idg	5001
244°	TDZE	150
	Apt Elev	150

RNAV (GPS) RWY 24

GEORGE DOWNER (AIV)

NA DME/DME RNP-0.3 NA. Use Tuscaloosa altimeter setting; when not received, use Columbus/W Point/Starkville altimeter setting and increase all MDAs 20 feet, and Circling Cat C visibility ¼ SM. Procedure NA at night. Rwy 24 helicopter visibility reduction below 1 SM NA.	MISSED APPROACH: Climb to 3000 direct ZESLO and hold.
--	---

TCL ASOS 132.825	COLUMBUS APP CON 135.6 323.275	UNICOM 122.8 (CTAF) 0
---------------------	-----------------------------------	--------------------------

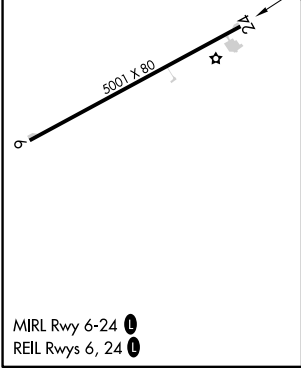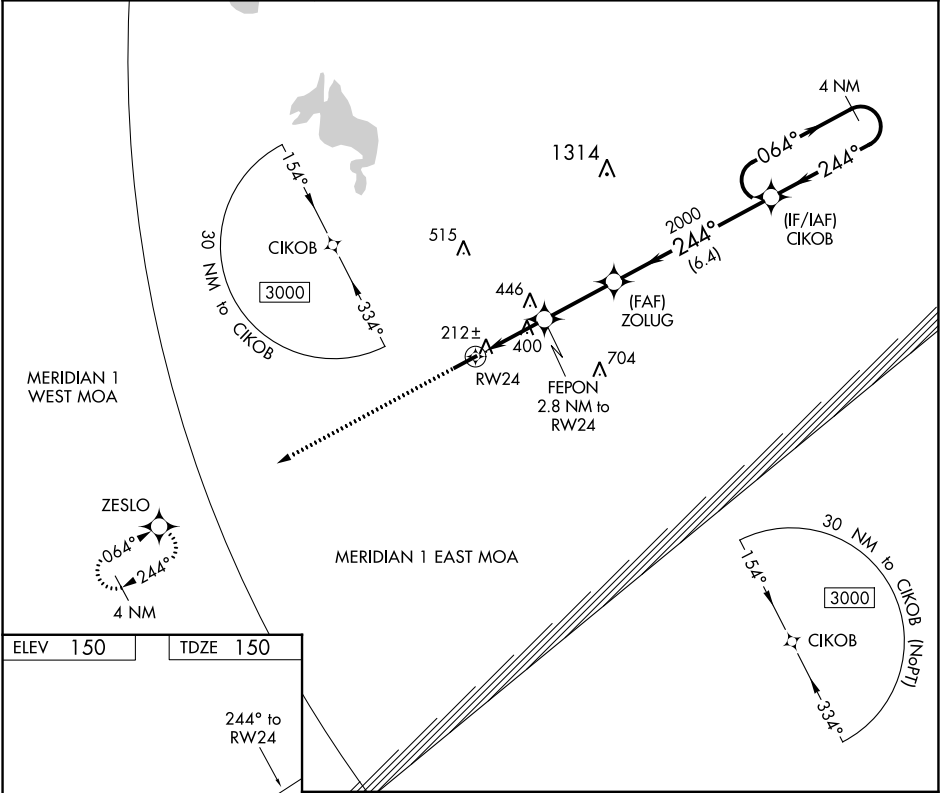

Visual Segment - Obstacles.		CIKOB 4 NM Holding Pattern	
ZOLUG		3000	
FEPON 2.8 NM to RW24		244°	
RW24		064°	
1100		244°	
2000		3000	
2.8 NM		6.4 NM	
CATEGORY	A	B	C
LNAV MDA	740-1	590 (600-1)	740-1¾ 590 (600-1¾)
CIRCLING	740-1	590 (600-1)	820-1¾ 900-2½ 670 (700-1¾) 750 (800-2½)