

|                                        |                        |                                                                 |
|----------------------------------------|------------------------|-----------------------------------------------------------------|
| WAAS<br>CH <b>78209</b><br><b>W20A</b> | APP CRS<br><b>206°</b> | Rwy Idg <b>5500</b><br>TDZE <b>1020</b><br>Apt Elev <b>1028</b> |
|----------------------------------------|------------------------|-----------------------------------------------------------------|


## RNAV (GPS) RWY 20

MOREHEAD-ROWAN COUNTY CLYDE A THOMAS RGNL (SYM)

**⚠** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Mount Sterling altimeter setting. When local altimeter setting not received, use Mount Sterling altimeter setting: increase all DA 50 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1/2 mile, LNAV Cats C/D visibility 1/2 mile, and Circling Cats C/D visibility 1/4 mile.

**MISSED APPROACH:**  
Climb to 3600 direct  
CIPUL and hold.

|                         |                                               |                                 |
|-------------------------|-----------------------------------------------|---------------------------------|
| AWOS-3<br><b>119.95</b> | INDIANAPOLIS CENTER<br><b>124.225 360.725</b> | UNICOM<br><b>122.7 (CTAF) 0</b> |
|-------------------------|-----------------------------------------------|---------------------------------|

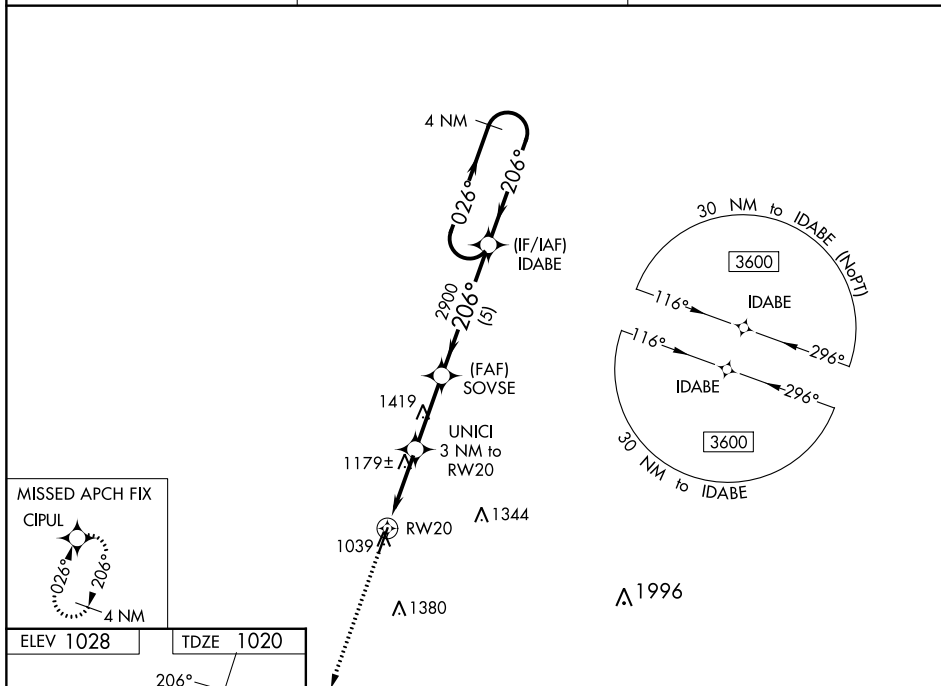

| CATEGORY     | A          | B               | C                     | D                             |
|--------------|------------|-----------------|-----------------------|-------------------------------|
| LPV DA       | 1270-7/8   | 250 (300-7/8)   |                       |                               |
| LNAB/VNAV DA | 1453-1 1/2 | 433 (500-1 1/2) |                       |                               |
| LNAB MDA     | 1440-1     | 420 (500-1)     | 1440-1 1/4            | 420 (500-1 1/4)               |
| CIRCLING     | 1520-1     | 492 (500-1)     | 1760-2<br>732 (800-2) | 1820-2 1/2<br>792 (700-2 1/2) |