

LOC I-ORL <u>109.9</u>	APP CRS 073°	Rwy Idg TDZE Apt Elev	5604 109 113
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 7
EXEC (ORL)

RADAR required for procedure entry. DME or RADAR required.


- ▼** Circling Rwy 31 NA at night. In minimum visibility conditions, bright lights on highway ½ mile south of airport may be mistaken for runway lights. For inop ALS, increase S-ILS 7 all Cats visibility to RVR 4500 and S-LOC 7 Cats A/B visibility to RVR 5500. Rwy 7 helicopter visibility reduction below ¾ SM NA. Autopilot coupled approach NA below 320.

MALSR



MISSED APPROACH: Climb on ORL VORTAC R-066 to cross MSHEL/ORL 6.5 DME/RADAR at 1500 then climbing left turn to 1600 on heading 020° and ORL VORTAC R-049 to OVIDO/ORL 13 DME and hold.

ATIS 127.25	ORLANDO APP CON 124.8 351.9	EXECUTIVE TOWER ★ 118.7 (CTAF) 0 239.0	GND CON 121.4 239.0	CLNC DEL 128.45	UNICOM 122.95
----------------	--------------------------------	---	------------------------	--------------------	------------------

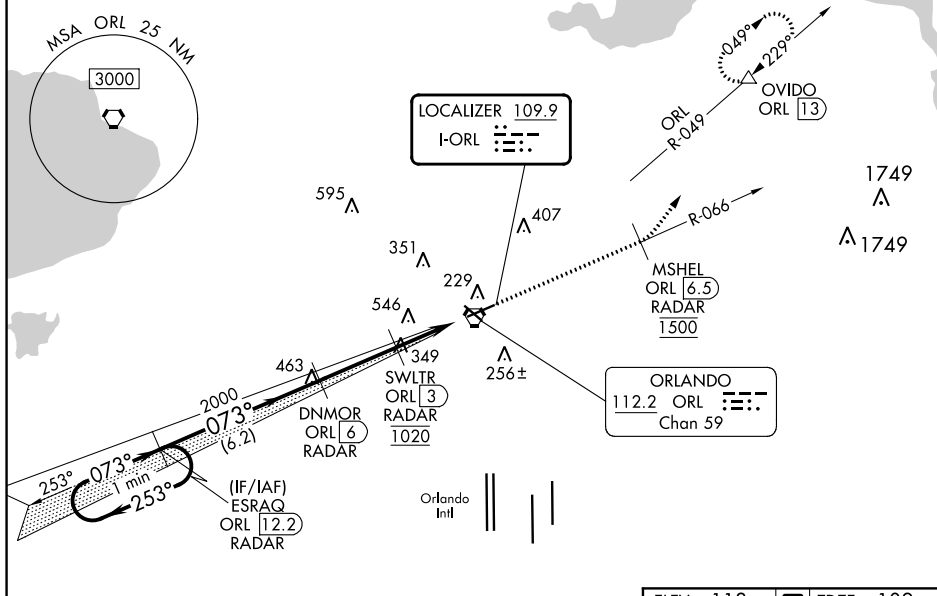

One Minute Holding Pattern

ESRAQ ORL 12.2 RADAR

2000 ← 253°

073° →

GS 3.00° TCH 52

2000

2000

*1020

2000

DNMOR ORL 6 RADAR

SWLIR ORL 3 RADAR

ORL VORTAC

ORL 0.2

1500 MSHEL ORL 6.5 RADAR

1600 hdg 020° ORL R-049

OVIDO ORL 13

*LOC only.

CATEGORY	A	B	C	D
S-ILS 7	391/40 282 (300-¾)			
S-LOC 7	660/40	551 (600-¾)	660/60	551 (600-1¼)
CIRCLING	660-1 547 (600-1)	680-1 567 (600-1)	860-2¼ 747 (800-2¼)	860-2½ 747 (800-2½)

REIL Rwy's 13 and 31

HIRL Rwy's 7-25 and 13-31

FAF to MAP 5.8 NM

Knots	60	90	120	150	180
Min:Sec	5:48	3:52	2:54	2:19	1:56

EXEC (ORL)
ILS or LOC RWY 7