

SANTA ANA, CALIFORNIA

AL-377 (FAA)

22307

APP CRS	Rwy Idg	5700
016°	TDZE	56
	Apt Elev	56

RNAV (GPS) Y RWY 2L
JOHN WAYNE/ORANGE COUNTY (SNA)

RNP APCH - GPS.		MISSED APPROACH: Climb to 800 then climbing left turn to 2600 direct SLI VORTAC and hold.				
 Circling Rwy 20L NA at night.						
D-ATIS 126.0	SOCAL APP CON 121.3 263.1	JOHN WAYNE TOWER ★ 126.8 (CTAF) 0 343.625	GND CON 120.8	CLNC DEL 118.0	CPDLC	UNICOM 122.95


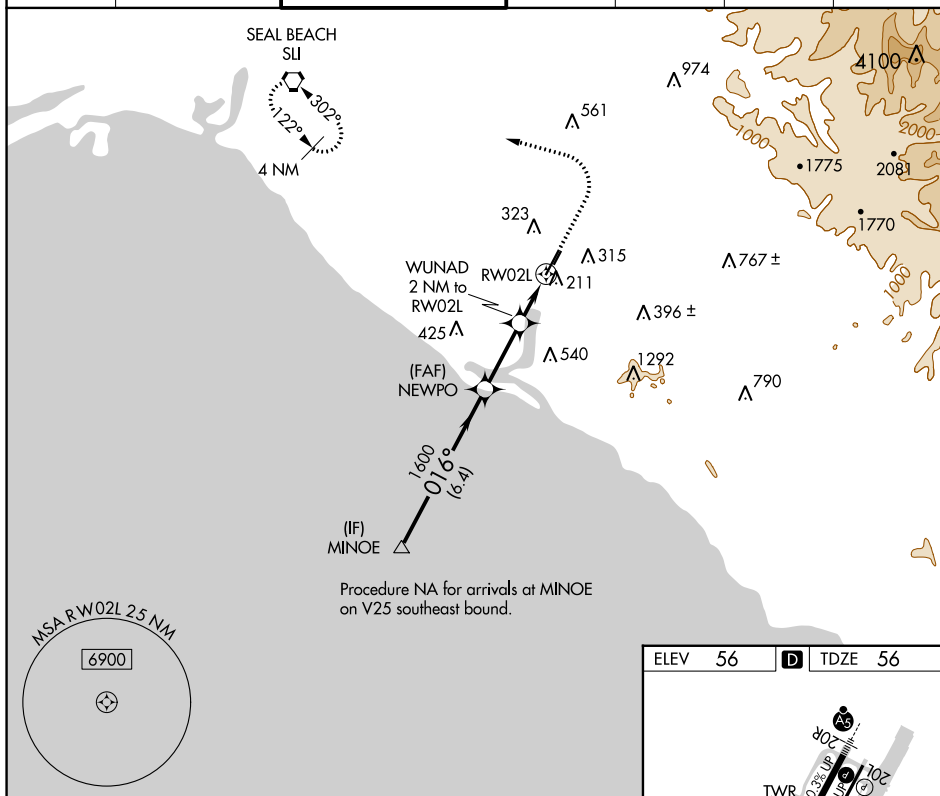


Diagram illustrating a non-parallel VGS (Visual Glide Slope) scenario. The diagram shows a flight path from MINOE to NEWPO to WUNAD. The path from MINOE to NEWPO is 3000 feet at 016 degrees. The path from NEWPO to WUNAD is 1600 feet at 3.00 degrees TCH 55. The path from WUNAD to RW02L is 740 feet at 1.2 NM to RW02L. The diagram also shows a 6.4 NM distance from MINOE to NEWPO, a 2.7 NM distance from NEWPO to WUNAD, and a 0.8 NM distance from WUNAD to RW02L. A 1.2 NM distance is also indicated from WUNAD to RW02L. The diagram includes a legend for VGS symbols: a vertical line for MINOE, a horizontal line for NEWPO, and a curved line for WUNAD. The diagram also includes a legend for VGS symbols: a vertical line for MINOE, a horizontal line for NEWPO, and a curved line for WUNAD.

CATEGORY	A	B	C	D
LNAV MDA	520-1	464 (500-1)	520-1 $\frac{3}{8}$	464 (500-1 $\frac{3}{8}$)
C CIRCLING	640-1	584 (600-1)	840-2 $\frac{1}{4}$ 784 (800-2 $\frac{1}{4}$)	1160-3 1104 (1200-3)

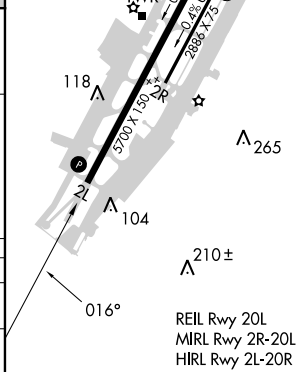

SANTA ANA, CALIFORNIA
Amdt 2A 03NOV22

JOHN WAYNE/ORANGE COUNTY (SNA)
RNAV (GPS) Y RWY 2L

33°41'N-117°52'W