


ILS RWY 5 (CAT II)

LOC I-FRC 110.3	APCH CRS 051°	Rwy Idg 13,899 TDZE 2462 Arpt Elev 2462	AL-553 [USAF]	FAIRCHILD AFB (KSKA)
RADAR required for KNOCK holding.			ALSF-2	MISSED APPROACH: Climb to 7000 via SKA TACAN R-047. At FANOT turn left hdg 275° to intcp SKA R-320 to KNOCK and hold, continue climb in hold to 7000.
ATIS 257.625	SPOKANE APP CON 123.75 282.25 133.35 263.0 (208° - 028°) (029° - 207°)		TOWER 120.35 233.7	GND CON 123.6 275.8

CATEGORY II ILS SPECIAL
AIRCREW & AIRCRAFT
CERTIFICATION
REQUIRED

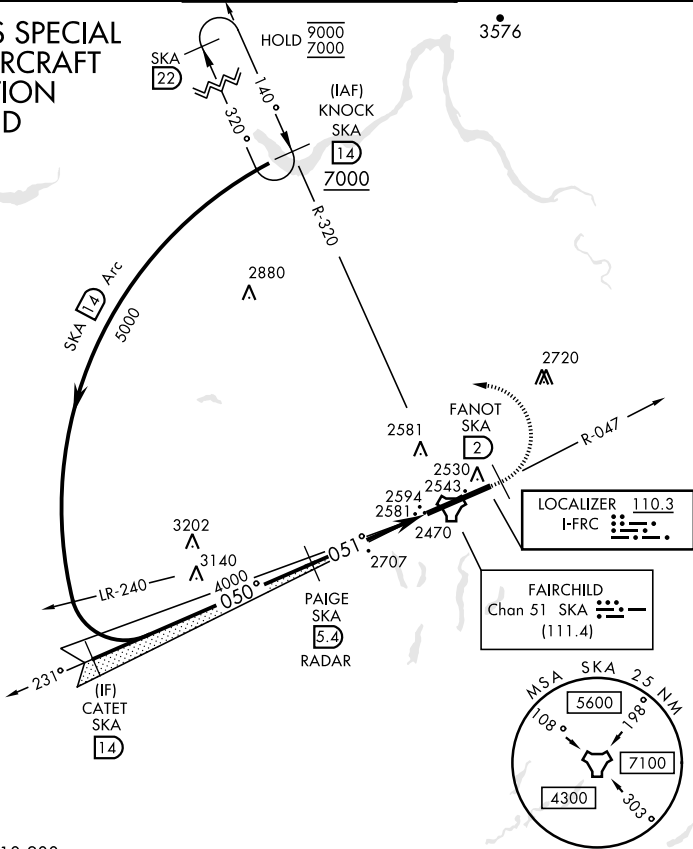

EMERG SAFE ALT 100 NM 10,900

KNOCK (14) 7000		CATET (14) Intcp Lczt	PAIGE (5.4) 4000	7000 SKA R-047	FANOT (2) hdg 275°	SKA R-320	ELEV 2462	TDZE 2462
5000 Arc (14)		5000	4000	4000	4000	4000	2569	2583
GS 3.00° TCH 58		050°	051°	051°	051°	051°	2643	2685
4.6 NM		4.6 NM	4.6 NM	4.6 NM	4.6 NM	4.6 NM	2583	2685
CATEGORY	A	B	C	D	E		HIRL Rwy 5-23 TDZL/CL Rwy 5	
S-ILS 5	RA 98/12		100	DA 2562				

ILS RWY 5 (CAT II)