

LOC I-MCW <u>109.5</u>	APP CRS 360°	Rwy Idg TDZE Apt Elev	6401 1193 1213
----------------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 36
MASON CITY MUNI (MCW)

DME required.


T For inoperative ALS, increase S-LOC 36 Cats C and D visibility to 1 3/4 SM. DME from MCW VOR/DME. DME use requires simultaneous reception of I-MCW and MCW DME.

MAISR



MISSED APPROACH: Climb to 2900 then climbing left turn to 3200 on heading 170° and MCW R-332 to MCW VOR/DME and on MCW R-173 to PICDI/MCW VOR/DME 9 DME and hold.

ASOS 120.3	MINNEAPOLIS CENTER 127.3 257.675	UNICOM 123.0 (CTAF) ①
----------------------	--	---------------------------------

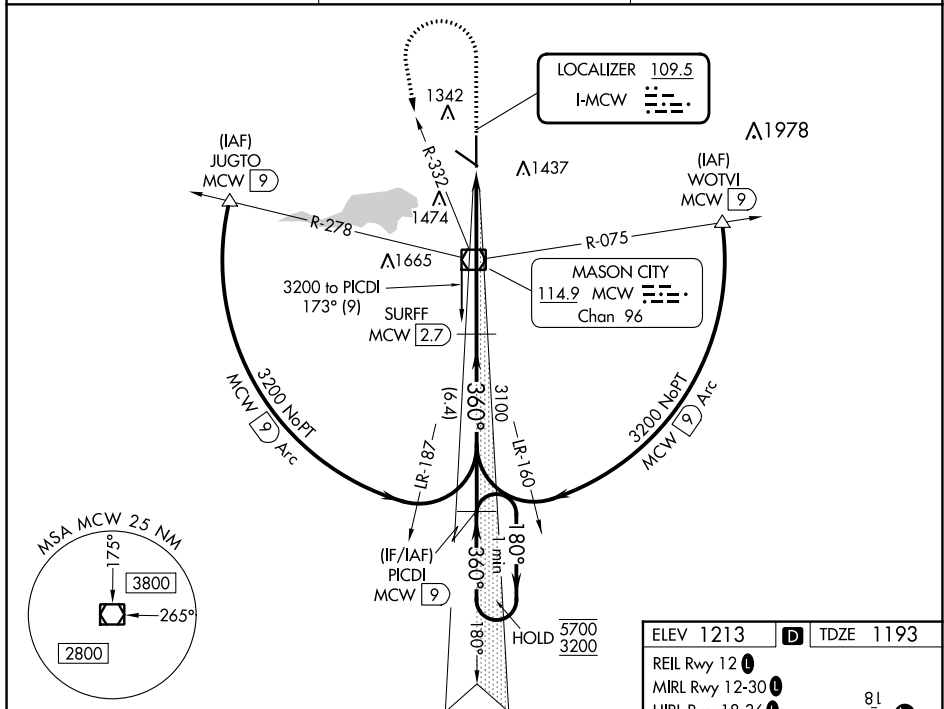

2900 ↑	3200 hdg 170°	MCW R-332	MCW R-173	PICDI MCW 9	VGSI and ILS glidepath not coincident (VGSI Angle 2.90/TCH 62).
					One Minute Holding Pattern
CATEGORY	A	B	C	D	
S-ILS 36	1393-1/2 200 (200-1/2)				
S-LOC 36	1800-1/2 607 (600-1/2)		1800-13/8 607 (600-13/8)		
CIRCLING	1800-1 587 (600-1)		1800-13/4 587 (600-13/4)		1800-2 587 (600-2)

