

WAAS CH 49106 W33A	APP CRS 326°	Rwy Idg 10179 TDZE 93 Apt Elev 100
--	------------------------	---

RNAV (GPS) RWY 33
COLD BAY (CDB) (PACD)

RNP APCH. ▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C or above 54°C. Circling NA for Cat A southwest of Rwy 15-33 at night. Circling NA for Cat B/C/D southwest of Rwy 15-33. ▲	MISSED APPROACH: Climb to 3000 direct DEADS and hold.
---	---

ASOS 135.75	ANCHORAGE CENTER 118.5 278.3	COLD BAY RADIO 123.6 (CTAF) 0
-----------------------	--	---

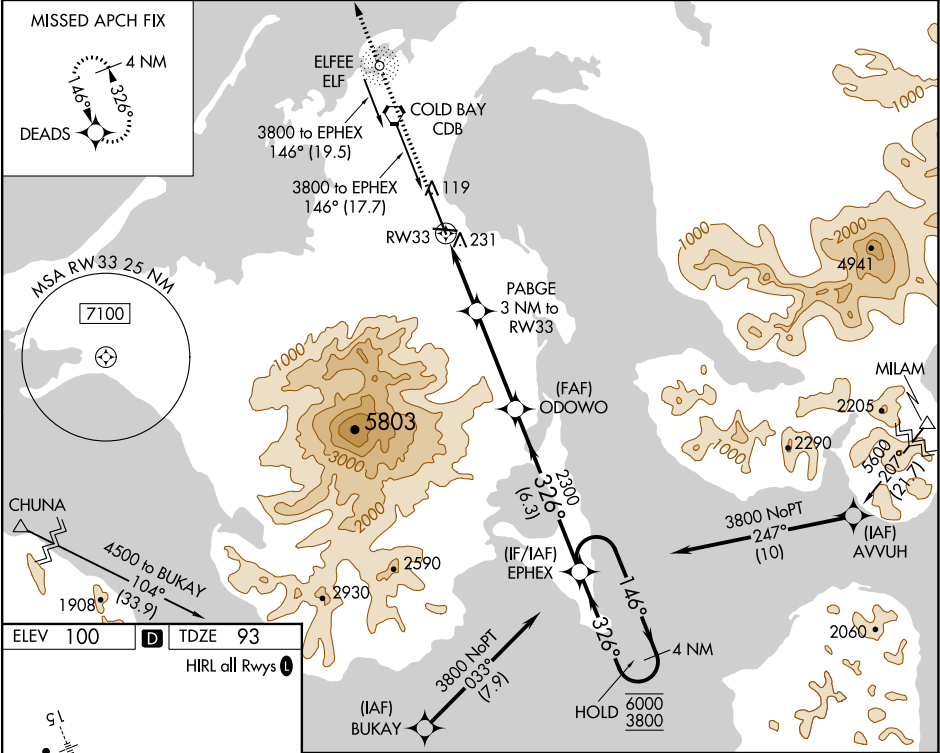


Diagram illustrating the approach procedure:

- Initial Approach:** 100/94 X 1.00
- Altitude:** 4900 X 1.50
- Distance:** 1.2 NM, 1.8 NM, 3.8 NM, 6.3 NM
- Altitudes:** 3000, 2300, 1100*, 6000, 3800
- Angles:** 326°, 146°
- GP 3.00° TCH 55**
- Obstacles:** A5, 8, 26, 33A, 112±
- Waypoints:** RW33, PABGE, ODOVO, EPHEX
- Navigation:** *LNAV only, *1.2 NM to RW33
- Notes:** VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 36).

CATEGORY	A				B		C		D	
LPV DA	293-¾				200 (200-¾)					
LNAV/VNAV DA	392-⅞				299 (300-⅞)					
LNAV MDA	500-1		407 (400-1)		500-1½		407 (400-1½)			
CIRCLING	540-1		560-1		560-1½		860-2½			
	440 (500-1)		460 (500-1)		460 (500-1½)		760 (800-2½)			