

WAAS
CH **49144**
W14A

APP CRS
140°

Rwy Idg
TDZE **181**
Apt Elev **187**

RNAV (GPS) RWY 14

STATESBORO-BULLOCH COUNTY (TBR)

RNP APCH-GPS.

⚠


Circling to Rwy 6/24 NA at night. Baro-VNAV and VDP NA when using Sylvania altimeter setting. Rwy 14 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. When local altimeter setting not received, use Sylvania altimeter setting and increase LPV DA to 525 feet and all visibilities ¾ SM. Increase LNAV/VNAV DA to 547 feet; increase all MDAs 40 feet and LNAV visibility Cat C/D ¼ SM, and Circling visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 2600 direct HENUT and hold.

AWOS-3
119.025

SAVANNAH APP CON★
118.4 354.0

UNICOM
122.725 (CTAF) 0

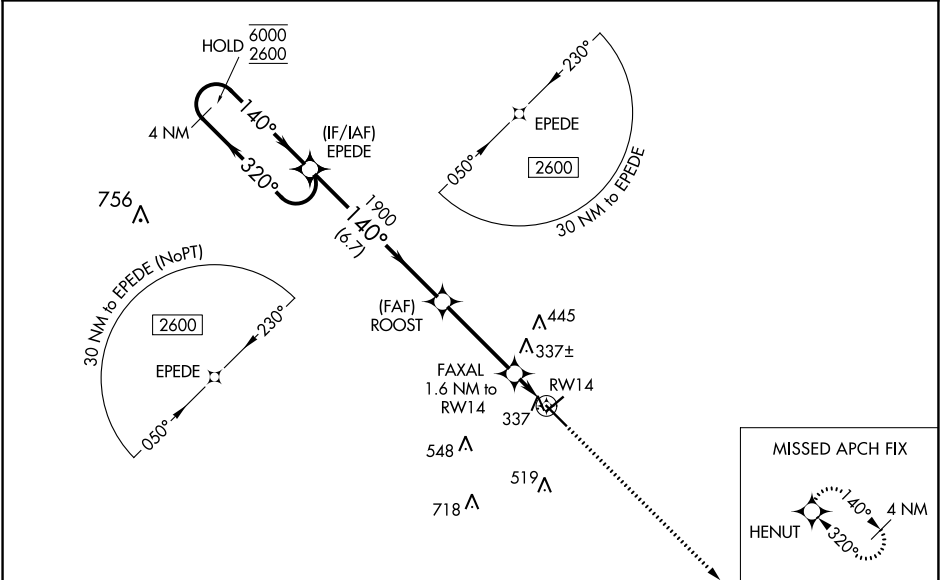

ELEV 187

TDZE 181

VGSI and RNAV glidepath not coincident (VGSI Angle 4.00/TCH 42).

4 NM Holding Pattern

EPEDE

ROOST

FAXAL

RWY 14

HENUT

GP 3.00° TCH 45

6000

2600

1900

740

140°

320°

140°

190°

740°

6.7 NM

3.6 NM

0.7 NM

0.9 NM

4382 X 100

6000 X 100

0.4 % UP

HIRL Rwy 14-32 0

CATEGORY	A	B	C	D
LPV DA	496-7/8	315 (400-7/8)		
LNAV/VNAV DA	518-1	337 (400-1)		
LNAV MDA	600-1	419 (500-1)	600-1 1/8	419 (500-1 1/8)
CIRCLING	640-1 453 (500-1)	740-1 553 (600-1)	840-1 3/4 653 (700-1 3/4)	860-2 1/4 673 (700-2 1/4)