

WAAS CH 62805 W35A	APP CRS 350°	Rwy Idg 5000 TDZE 756 Apt Elev 763
--	------------------------	---

RNAV (GPS) RWY 35
HURON COUNTY MEML (BAX)

RNP APCH.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use MBS Intl altimeter setting and increase all DA 129 feet and all MDA 140 feet; increase LPV all Cats and LNAV Cat C visibility $\frac{3}{8}$ mile. Rwy 35 helicopter visibility reduction below $\frac{3}{8}$ SM NA. VDP and Baro/VNAV NA when using MBS Intl altimeter setting.

MISSED APPROACH: Climb to 3000
direct ELARE and hold.

AWOS-3
118.6

CLEVELAND CENTER
127.7 290.425




UNICOM
123.075 (CTAF) 

MISSED APRCH FIX




Procedure NA for arrivals
at MBS VOR/DME on
V320 northwest bound.

SAGINAW
MBS

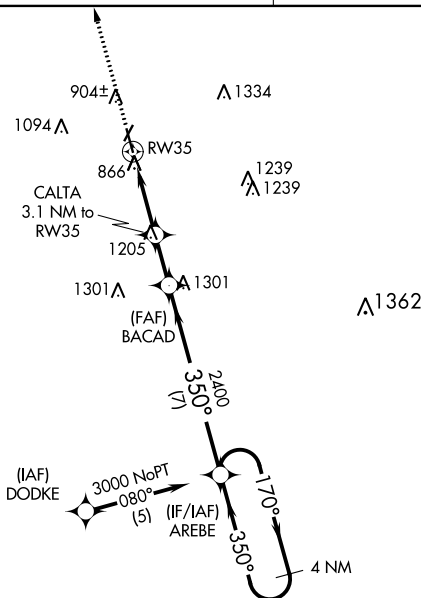


ELEV 763

TDZE 756

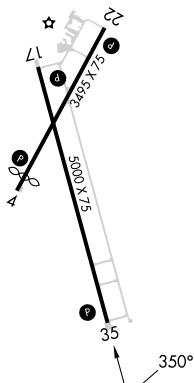

REIL Rwys 17 and 35 **L**
MIRL Rwys 4-22 and 17-35 **L**

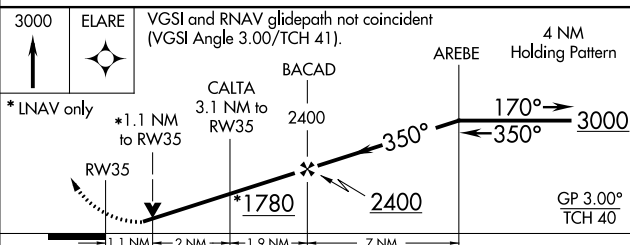

CATEGORY	A	B	C	D
LPV DA	1113-1¼	357 (400-1¼)		NA
LNAV/ VNAV DA	1154-1½	398 (400-1½)		NA
LNAV MDA	1520-1 764 (800-1)	1520-1¼ 764 (800-1¼)	1520-2½ 764 (800-2½)	NA