

WAAS
CH **93933**
W29A

APP CRS
294°

Rwy Idg **5103**
TDZE **579**
Apt Elev **585**

RNAV (GPS) RWY 29

EFFINGHAM COUNTY MEML (1H2)

RNP APCH.


▼

▲

Rwy 29 helicopter visibility reduction below $\frac{3}{4}$ SM NA. Straight-in Rwy 1 NA at night, Circling Rwy 1, 19 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV below -16°C or above 54°C. Baro-VNAV and VDP NA when using Olney-Noble altimeter setting. When local altimeter setting not received, use Olney-Noble altimeter setting and increase all DA 77 feet and all MDA 80 feet; increase LPV all Cats and Circling Cat C/D visibility $\frac{1}{4}$ SM, increase LNAV/VNAV all Cats visibility $\frac{3}{8}$ SM.

MISSED APPROACH:
Climb to 1800 then climbing left turn to 2300 direct JOVAR and hold.

AWOS-3PT 118.375	KANSAS CITY CENTER 124.3 269.15	UNICOM 122.725 (CTAF) ①
----------------------------	---	-----------------------------------

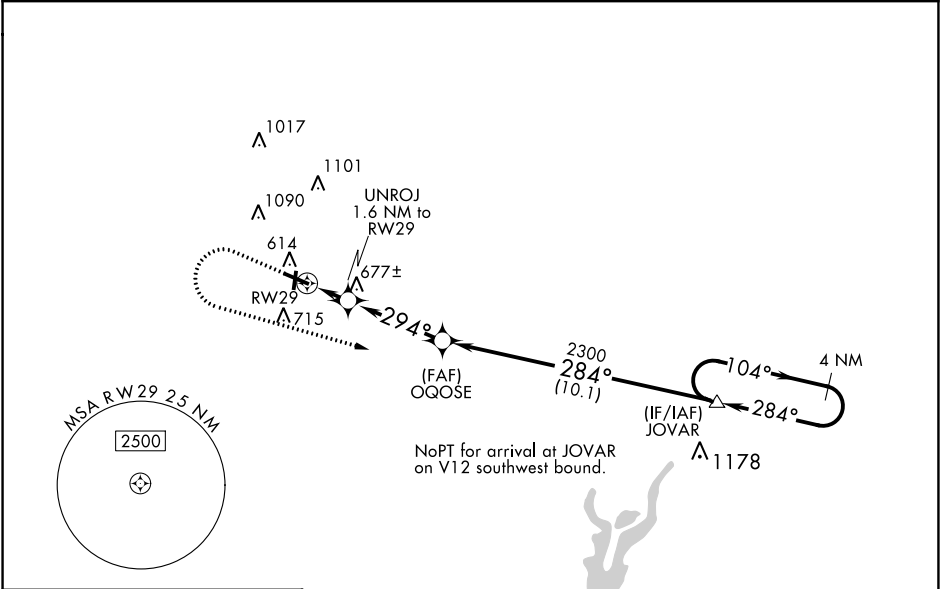

ELEV **585**

TDZE **579**

REIL Rwy 11 and 29 ①

MIRL Rwy 1-19 and 11-29 ①

	1800	2300	JOVAR	
	↑	↶	△	
	*LNAV only.			
	UNROJ 1.6 NM to RW29			
	*1 NM to RW29			
	RW29			
	*1120			
	OQOSE 2300			
	JOVAR 2300			
	4 NM Holding Pattern			
	GP 3.00° TCH 45			
	1 NM 0.6 NM 3.7 NM 10.1 NM			
CATEGORY	A	B	C	D
LPV DA	838-7/8 259 (300-7/8)			
LNAV/VNAV DA	859-7/8 280 (300-7/8)			
LNAV MDA	940-1 361 (400-1)			
Ⓢ CIRCLING	1020-1 435 (500-1)	1140-1 555 (600-1)	1440-2½ 855 (900-2½)	1440-2¾ 855 (900-2¾)