


LOC/DME I-PGD	APP CRS	Rwy Idg	7193
109.75	035°	TDZE	24
Chan 34		Apt Elev	26

ILS or LOC RWY 4
PUNTA GORDA (PGD)

⚠ When local altimeter setting not received, use Page Fld altimeter setting and increase DA to 274 feet and all MDAs 60 feet; increase S-LOC 4 Cats C and D visibility 1/8 SM, and Circling Cats C and D visibility 1/4 SM; ISOXE fix minimums: increase S-LOC 4 Cats C and D visibility 1/8 SM, and Circling Cats C and D visibility 1/4 SM.				MISSED APPROACH: Climb to 500 then climbing right turn to 2000 on heading 040° and PGD VOR R-059 to JOCKS INT and hold.		
ATIS ★	FORT MYERS APP CON ★	PUNTA GORDA TOWER ★	GND CON	CLNC DEL	CLNC DEL	UNICOM
135.675	127.05 306.2	121.0 (CTAF) 0	119.55	119.55	127.05 (When twr closed)	122.975

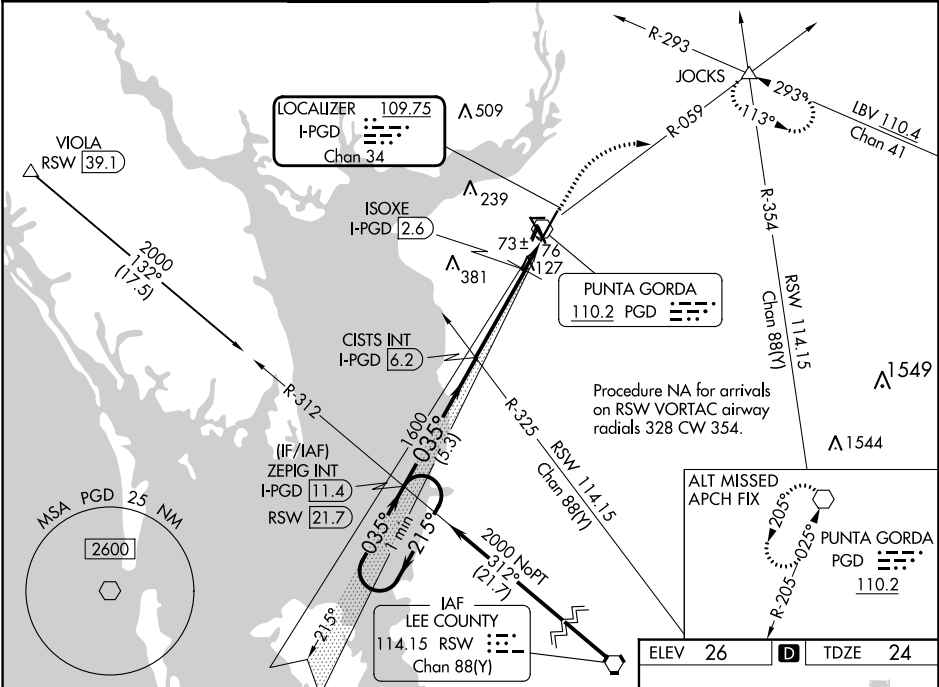

* 520 When using Page Fld altimeter setting.				500	2000	PGD	JOCKS
One Minute Holding Pattern				↑	hdg 040°	R-059	△
ZEPIG INT I-PGD 11.4				*LOC only.			
2000 ← 215° 035° → 035°				CISTS INT I-PGD 6.2			
GS 3.00° TCH 50				ISOXE I-PGD 2.6 I-PGD 1.4			
5.3 NM 3.6 NM 1.2 NM				*460			
CATEGORY	A	B	C	D			
S-ILS 4	224-¾			200 (200-¾)			
S-LOC 4	460-1	436 (500-1)	460-1¼	436 (500-1¼)			
CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1½ 574 (600-1½)	740-2¼ 714 (800-2¼)			
ISOXE FIX MINIMUMS (DME REQUIRED)							
S-LOC 4	380-1			356 (400-1)			
CIRCLING	460-1 434 (500-1)	580-1 554 (600-1)	600-1½ 574 (600-1½)	740-2¼ 714 (800-2¼)			

