

WAAS CH <b>99508</b> <b>W09B</b>	APP CRS <b>093°</b>	Rwy ldg <b>7500</b> TDZE <b>668</b> Apt Elev <b>680</b>
--	------------------------	---


# RNAV (GPS) RWY 9L

CHICAGO O'HARE INTL (ORD)


RADAR required for procedure entry. RNP APCH.		ALSIF-2 	MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct OBK VOR/DME and hold, continue climb-in-hold to 4000.
<p>Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -1°C or above 54°C.</p>			

CHICAGO APP CON <b>119.0 292.125</b>	O'HARE TOWERS <b>128.15 348.0</b> (Rwy 9L/27R) <b>133.0 348.0</b> (10R/28L) <b>120.75 121.15 126.9 132.7 348.0</b> (CENTER)	GND CON (TWR NORTH) <b>124.125</b> (TWR SOUTH) <b>118.05</b> (ALL TWRS) <b>226.675</b>	(TWR CENTER) <b>121.75</b> (OBND) (IBND) <b>121.9</b>	CLNC DEL <b>121.6</b>
---	--	--	--	--------------------------

D-ATIS <b>135.4</b> <b>282.225</b>	NORTHBROOK OBK  9 NM	CPDLC
--	----------------------------	-------

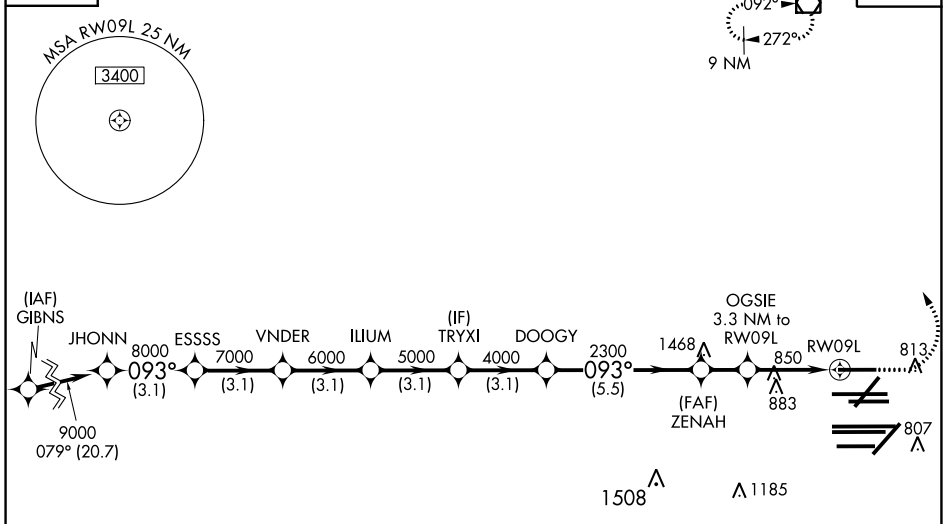

ELEV 680		TDZE 668	
093° to RW09L			
JHONN 9000	ESSSS 8000	VNDER 7000	ILIUM 6000
TRYXI 5000	DOOGY 4000	ZENAH 2300	OGSIE 3.3 NM to RW09L
GP 3.00° TCH 55		*LNAV only.	
3.1 NM		*1.2 NM to RW09L	
CATEGORY	A	B	D
LPV DA	868/18		200 (200-½)
LNAV/VNAV DA	1034/35		366 (400-¾)
LNAV MDA	1100/24	432 (500-½)	1100/40 432 (500-¾)
HIRL all Rwys TDZ/CL all Rwys except 4L			

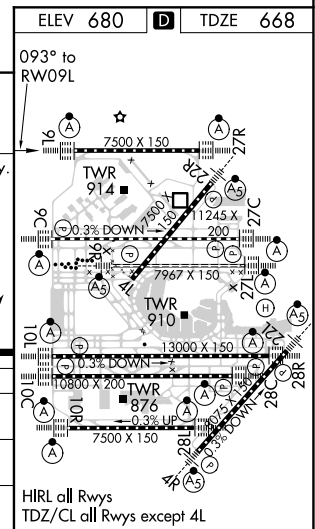

EC-3, 22 APR 2021 to 20 MAY 2021

EC-3, 22 APR 2021 to 20 MAY 2021